


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

Comanche County, Sec. 34 Twp. 31S Rge. (E) 16 (W)  
Location as "NE/CNW/SW" or footage from lines C SE SE  
Lease Owner Kenneth Rupp  
Lease Name Scheutte Well No. 1  
Office Address 1035 Wichita Plaza, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 12-12 19 66  
Application for plugging filed (12-12-66 Phone) 12-19 19 66  
Application for plugging approved 12-12 19 66  
Plugging commenced 12-12 19 66  
Plugging completed 12-12 19 66  
Reason for abandonment of well or producing formation \_\_\_\_\_

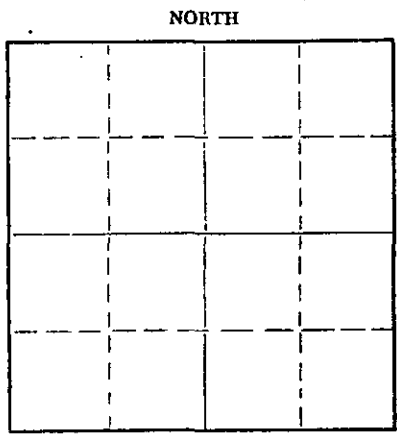

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie Elving  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4987 Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	245	8-5/8	245'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy mud to 245 feet. Set first plug with one sack of hulls and 25 sacks cement. Filled hole with heavy mud to 40 feet. Set second plug with 1/2 sack hulls and 10 sacks cement. Plugged rat hole with 2 sacks cement.

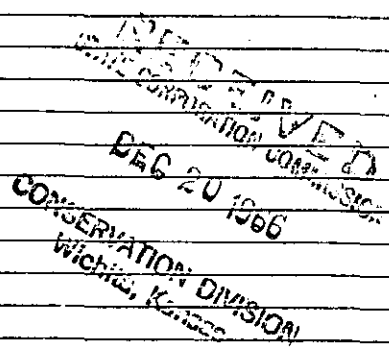

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones, Inc.  
Address 830 Sutton Place, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
E. E. HALL (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
830 Sutton Place, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of December, 1966

My commission expires February 1, 1968  
Barbara J. Layton Notary Public.

GABBERT-JONES, INC.  
WICHITA, KANSAS  
DRILLERS' WELL LOG

Scheutte #1  
C SE SE Section 34-31S-16W  
Comanche County, Kansas

Commenced: November 30, 1966  
Completed: December 12, 1966.

OPERATOR - Kenneth Rupp

---

DEPTH		FORMATION	REMARKS
From	To		
0	130	Red bed	
130	190	Lime	
190	245	Red bed	Ran 11 joints of 8-5/8" casing set @ 245' w/225 sacks cement.
245	1160	Red bed	
1160	1605	Shale	
1605	2000	Shale and shells	
2000	2125	Lime and shale	
2125	2740	Lime	
2740	3400	Lime and shale	
3400	3490	Lime	
3490	3595	Lime and shale	
3595	3790	Lime	
3790	4230	Lime and shale	
4230	4835	Lime	
4835	4897	Chert and lime	
4897	TD		Dry and abandoned

**RECEIVED**  
OIL AND GAS REGULATION COMMISSION  
DEC 20 1966  
REGULATION DIVISION  
TOPEKA, KANSAS

I, E. E. HALL, certify this is a correct copy of the Drillers' Log for the well drilled in the C SE SE Section 34-31S-16W, Comanche County, Kansas, to the best of my knowledge and belief.

*E. E. Hall*  
\_\_\_\_\_  
E. E. HALL

STATE OF KANSAS            )  
                                  )SS  
COUNTY OF SEDGWICK    )

Before me, the undersigned, a Notary Public within and for said County and State, on this 19th day of December, 1966, personally appeared E. E. HALL, to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

*Barbara J. Layton*  
\_\_\_\_\_  
Barbara J. Layton, Notary Public

My Commission Expires February 1, 1968.