

15-007-01059-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Barber

County. Sec. 6 Twp. 34 Rge. 12 (E) 12 (W)

Location as "NE/CNW/SW" or footage from lines 990' from S line and 990' from

Lease Owner Braden-Deem, Inc. W line NW/4

Lease Name Donovan "A" Well No. 1

Office Address 200 E. First, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Gas

Date well completed 3/24/1974

Application for plugging filed 12/5 1973

Application for plugging approved 12/6 1973


Plugging commenced 2/28 1974

Plugging completed 3/1 1974

Reason for abandonment of well or producing formation Non-commercial

If a producing well is abandoned, date of last production November 1973

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

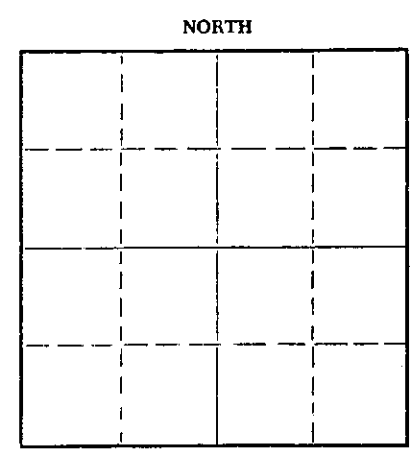

Name of Conservation Agent who supervised plugging of this well G. Russell Biberstein

Producing formation Mississippi Depth to top 4624 Bottom 4652 Total Depth of Well 4717 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		Surface	253	8-5/8	253	None
		Surface	4717	5-1/2	4717	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

5-1/2" casing squeezed @ 330' w/400 sks cement.

Push plug to 240' and dump 2 yds of Redimix cement from 240' to 4' below surface.

Plugging complete 3/1/74

RECEIVED
STATE CORPORATION COMMISSION
APR 22 1974
4-22-74
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Hayes Well Service
Address Attica, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Doy C. Deem (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) _____
200 E. First, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN to before me this 19 day of April, 1974

My commission expires March 21, 1978

Helen Schmitt
Notary Public.

15-007-01059-2000

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


COPY

Company- SKELLY OIL COMPANY
Farm- Donovan "A" No. 1

SEC. 6 T. 34 R. 12W
NE SW NW
990' fr SL, 990' fr WL

Total Depth. 4717' PB 4687'
Comm. 3-24-56 Comp. 4-7-56
Shot or Treated.
Contractor. Chas. Hulme Drlg.
Issued. 6-23-56

County Barber
KANSAS



Elevation. 1531' DE

Production. 43,389,000 CFG

CASING:

8 5/8" 253' cem w/200 sx
5 1/2" 4717' cem w/150 sx

Figures Indicate Bottom of Formations.

surface soil, red bed, and shells	253
shale & shells	1475
shale and lime	1730
lime	2370
lime and shale	3085
shale	3190
shale and lime	3320
lime	3490
lime and shale	3640
shale and sand	3795
lime	3850
shale	4000
lime	4605
white opaque, slightly tripolitic chert and white semi-translucent chert and light gray to light tan finely crystalline lime	4635
chert and shale.	4717
Total Depth	
Plug back to	4687'

Tops:

Heebner	3770
Douglas Sand	3852
Lansing Lime	3959
Base Kansas City Lime	4478
Marmaton Lime	4490
Mississippi lime	4607

DST #1 packer set at 4603', used 32' anchor, open 1 hr., gas to surface in 2 mins. gas gauged 3,500 MCF in 8 mins. 4,070 MCF in 15 mins., 4,350 MCF in 30 mins., 4,450 MCF in 45 mins., 4450 MCF in 1 hr., Rec. 65' of drilling mud, IFF 1320#, FFP 1420#, BHP 1670#, in 40 mins.

Ran Schlumberger Survey.

Acid Treatment No. 1 between 4624' and 4652' put in 4-16-56, by Halliburton, using 750 gallons of acid and 57 barrels of oil.

Producing Formation Mississippi Top 4624' Bottom 4652'.

RECEIVED
STATE CORPORATION COMMISSION
DEC 6 1973
12-6-73
CONSERVATION DIVISION
Wichita, Kansas