


15-007-20170-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Barber County, Sec ^{TMB} 32 ^{YCC} 30 Twp 33 Rge 14W (E) (W)
Location as "NE/CNW/SW" or footage from lines C SW NW

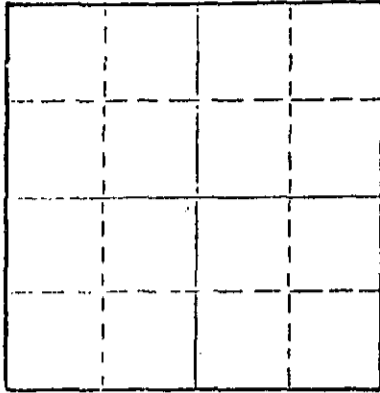

Locate well correctly on above
Section Flat

Lease Owner Graves Drilling Co.
Lease Name Lenkner Well No. 1
Office Address 910 Union Center, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 1 - 26 19 71
Application for plugging filed 4 - 30 19 76
Application for plugging approved 5 - 1 19 76
Plugging commenced 6 - 2 19 76
Plugging completed 6 - 8 19 76
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstien
Producing formation Depth to top Bottom Total Depth of Well 4850 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	881	None
				4 1/2	4848	4176

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sand from 4831' to 4750'
4 sacks cement from 4750' to 4710'
Wooden bridge at 250'
Rock from 250' to 240'
25 sacks cement from 240' to 165'
Mud from 165' to 50'
Rock from 50' to 40'
10 sacks cement from 40' to surface

STATE CORPORATION COMMISSION
JUL 18 1976
WICHITA, KANSAS

Name of Plugging Contractor Clarke Corporation
Address Box 187, Medicine Lodge, Kansas 67104

STATE OF _____ COUNTY OF _____, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Phil Graves*

(Address)

SUBSCRIBED AND SWORN TO before me this _____ day of _____, 19 _____

Robert P. ...
Notary Public.

ROTARY DRILLERS' LOG

OPERATOR: John C. Graves COMMENCED: 12-10-70
 505 Union Center
 Wichita, Kansas

CONTRACTOR: Graves Drilling Co., Inc. COMPLETED: 12-20-70
 505 Union Center
 Wichita, Kansas

SURFACE CASING: 8 5/8" set at 881' LOCATION: LENKNER # 1
 with 125 sacks cement NW/4, Section
 30-33-14W
 Barber County, Ks.

0	-	861	Red bed & shale
861	-	1660	shale & shells
1660	-	2220	shale & lime
2320	-	2565	lime
2565	-	3186	lime & shale
3186	-	3255	lime
3255	-	3450	lime with shale
3450	-	3984	lime
3984	-	4170	lime & shale
4170	-	4575	lime
4575	-	4763	lime & shale
4763	-	4826	XXXX lime

The foregoing statement is correct to the best of my knowledge.

STATE OF KANSAS)
COUNTY OF SEDGWICK)

Subscribed and sworn to before me, a Notary Public, this 15th day of January, 1971.

John C. Graves

My commission expires July 28, 1974

Mary Ann Scott, Notary Public

RECEIVED
 STATE CORPORATION COMMISSION
 JAN 03 1976
 5-3-76
 CONSERVATION DIVISION
 Wichita, Kansas