


15-007-01736-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

BARBER County. Sec. 29 Twp. 33S Rge. 14W (#) (W)
Location as "NE/CNW&SW&" or footage from lines C SW NE
Lease Owner PETROLEUM, INC.
Lease Name McGRATH "C" Well No. 2
Office Address ROUTE 2, GREAT BEND, KANSAS
Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE
Date well completed FEBRUARY 3 1960
Application for plugging filed FEBRUARY 3 1960
Application for plugging approved FEBRUARY 3 1960
Plugging commenced FEBRUARY 3 1960
Plugging completed FEBRUARY 3 1960
Reason for abandonment of well or producing formation NO PRODUCIBLE ZONES

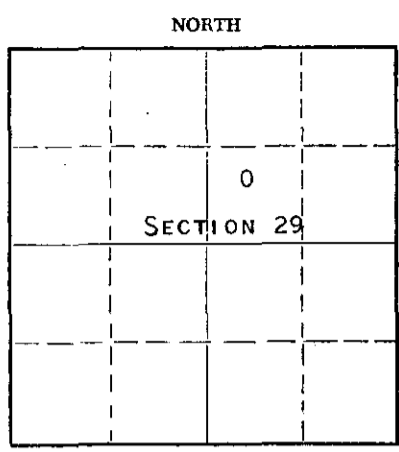

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production NONE 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well FRED W. HAMPEL, PRETTY PRAIRIE, KANSAS
Producing formation ----- Depth to top ----- Bottom ----- Total Depth of Well 4787' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	891'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

MUD UP WITH HEAVY MUD TO 240' FOLLOWED BY A WOODEN PLUG AND 1/3 SACK OF HULLS.
PLACED 15 SACKS OF CEMENT THROUGH DRILL PIPE ON TOP OF PLUG. MUD UP TO 30'
FOLLOWED BY A WOODEN PLUG AND 1/3 SACK OF HULLS. PLACED 8 SACKS OF CEMENT ON
TOP OF PLUG. FILLED HOLE TO BASE OF WELL CELLAR WITH 2 SACKS OF CEMENT.

RECEIVED
STATE CORPORATION COMMISSION

FEB 24 1960
7-24-60
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor GARVEY DRILLING COMPANY
Address ROUTE 2, GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.
DON SEARLE (employee of owner) or (#####) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Don Searle
ROUTE 2, GREAT BEND, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 19TH day of FEBRUARY, 19 60

Arthur J. Wiles
Notary Public.

My commission expires APRIL 14, 1963



15-007-01736-0000
WELL LOG

COMPANY PETROLEUM, INCORPORATED

SEC-29 T-33S R-14W

FARM MC GRATH "C" NO. 2


LOC. C-SW, NE

TOTAL DEPTH 4787'

COUNTY BARBER CO., KANSAS

COMM. January 21, 1960 COMP. February 3, 1960

CONTRACTOR GARVEY DRILLING COMPANY



CASING 8 5/8" @ 891' w/500 sax.

ELEVATION 1708' DF

PRODUCTION D & A

FIGURES INDICATE BOTTOM OF FORMATIONS

120	Red bed & rock
640	Red bed & shells
845	Red bed & gyp
891	Red bed & red rock
1060	Red bed
1580	Shale & shells
1760	Shale & lime
2200	Lime & shale
2635	Lime
2825	Lime & shale
3430	Shale & lime
3655	Lime & shale
3770	Shale & lime
3970	Lime & shale
4037	Shale
4073	Lime
4155	Lime & shale
4719	Lime
4742	Lime & chert
4787	Lime
4787	T. D.

RECEIVED
STATE CORPORATION COMMISSION

FEB 24 1960
2-24-60
CONSERVATION DIVISION
Wichita, Kansas

State of KANSAS }
County of BARTON } ss:

I, VERNE A. MORRIS of GARVEY DRILLING COMPANY

upon oath state that the above and foregoing is a true and correct copy of the log of the #2 MC GRATH "C" well.

Verne A. Morris

Subscribed and sworn to before me this 18th day of February 19 60

My Commission Expires: April 14, 1963

Arthur J. Wiles
NOTARY PUBLIC