


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission

P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

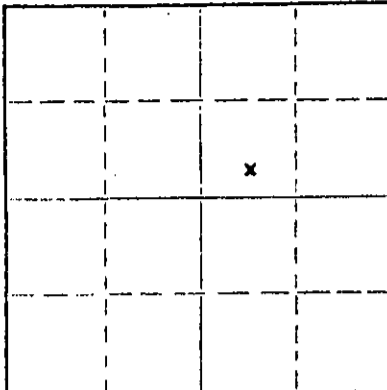

Locate well correctly on above  
Section Plat

Barber County, Sec. 27 Twp. 33S Rge. (E) 14 (W)  
Location as "NE/CNWKSWK" or footage from lines C S/2 SW NE  
Lease Owner Champlin Petroleum Company  
Lease Name U. B. Harbaugh Unit Well No. 1  
Office Address 6051 N. Brookline, Suite 116, Okla. City, Okla. 73112  
Character of Well (completed as Oil, Gas or Dry Hole) Gas  
Date well completed July 19 59  
Application for plugging filed 7-11 1975  
Application for plugging approved 7-14 1975  
Plugging commenced 9-4 1975  
Plugging completed 9-11 1975  
Reason for abandonment of well or producing formation depleted & uneconomical

If a producing well is abandoned, date of last production 9-2 1975  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein  
Producing formation Mississippi Depth to top 4669' Bottom 4704' Total Depth of Well 4716 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Mississippi	Gas & condensate	4669'	4704'	4-1/2"	4716'	3148'
				8-5/8"	872'	278'
				13-3/8"	199'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Spotted 35 sxs cement to 4375', shot 4 1/2" csg @ 3148'. Spotted 50 sxs cement, displaced with mud & 2 sxs hulls, from 822'-922'. Shot 8-5/8" csg at 278', spotted 50 sxs cement displaced with mud, and 2 sxs hulls, from 149'-249', capped surface with 15 sxs cement 3'-33', welded on steel plate.

RECEIVED  
STATE CORPORATION COMMISSION

SEP 25 1975  
9-25-75  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lillard Casing Pulling, Inc.  
Address P. O. Box 962, Woodward, Oklahoma 73801

STATE OF Oklahoma, COUNTY OF Oklahoma, ss.  
Harold E. Melvin

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Harold E. Melvin  
6051 N. Brookline, Suite 116, Okla. City, Okla.  
(Address) 73112

Subscribed and sworn to before me this 23rd day of September, 1975

My commission expires 10-8-75

Notary Public.

CHAMPLIN OIL & REFINING CO.  
U. B. HARBAUGH #1  
S/2 SW NE 27-33S-14W  
BARBER COUNTY  
KANSAS

0 - 918	Red Bed
918 - 1542	Red Bed & Shale
1542 - 1870	Shale
1870 - 2102	Shale & Lime
2102 - 2191	Brown Lime & Shale
2191 - 2317	Shale & Brown Lime
2317 - 2924	Shale & Lime
2924 - 3211	Shale
3211 - 3662	Shale & Lime
3662 - 3829	Lime & Shale - Gyp
3829 - 4298	Lime & Shale
4298 - 4716	Lime
4716 -	T.D.

RECEIVED  
STATE CORPORATION COMMISSION

JUL 14 1975  
7-14-75  
CONSERVATION DIVISION  
Wichita, Kansas

STATE OF Kansas, COUNTY OF Barton

J. W. Meyers (EMPLOYEE OF OWNER) of the above described well, being first duly sworn on oath, says:

That I Have Knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) \_\_\_\_\_  
\_\_\_\_\_  
(Address)

Subscribed and Sworn to before me this 13th day of August 19 59

[Signature]  
Notary Public

My commission expires 5-22-62