

15-007-10340-0000
R

WELL PLUGGING RECORD

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Barber County, Sec. 24 Twp. 33 Rge. 14 (E) (W)

Location as "NE/CNW/SW" or footage from lines Center SE

Lease Owner Messman-Rinehart Oil Co.

Lease Name Lenkner Well No. A #1

Office Address 518 Petroleum Bldg.

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed _____ 19__

Application for plugging filed _____ 19__

Application for plugging approved _____ 19__


Plugging commenced 2-2-62 _____ 19__

Plugging completed 2-8-62 _____ 19__

Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

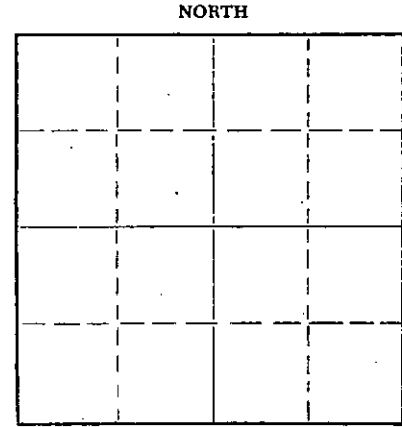

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Fred Hampel

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4852' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded back to 4650' with 5 sacks cement thru dump baler.

Pulled pipe.

Mudded hole to 235' sat 10' rock bridge. Mixed and ran 20 sacks cement thru dump baler. Mudded hole to 40' and sat 10' rock bridge. Mixed and dumped 10 sacks cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

FEB 1 - 1962
2-12-62
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co., Inc.

Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

Southwest Casing Pulling Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer

Box 364, Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 9 day of February, 19 62

My commission expires 24 October 1964

Ernest D. Miller
Notary Public.



NO. 1 LENKNER "A"

WELL RECORD

Location: C SE/4, 24-33S-14W
Barber County, Kansas

Commenced: November 18, 1954

Operator: Gramhart-Miller Oil Company
1005 East Second, Wichita, Kansas

Completed: December 4, 1954

Elevation: 1840' KB

Contractor: Graham-Messman-Rinehart Drilling Co.
1005 East Second, Wichita, Kansas

Production:

Casing Record: 8 5/8" @ 280' w/200 sacks cement
5 1/2" @ 4852' w/75 sacks cement

RECEIVED
STATE CORPORATION COMMISSION

MAR 19 1962
3-19-62
CONSERVATION DIVISION
Wichita, Kansas

.....L O G.....

Sand-Clay	30
Sandy Red Bed	106
Red Bed	280
Sand-Red Bed	428
Red Bed-Shale	1352
Shale-Lime	1645
Lime-Shale	3833
Sandy Lime-Shale	3950
Lime-Shale	4446
Lime	4519
Lime-Shale	4683
Lime	4717
Chert	4764
Chert-Lime-Shale	4788
Lime	4842
Lime-Shale	4909 R.T.D.

Schlumberger Tops:

Heebner	4000 (-2160)
Douglas	4039 (-2199)
Lansing	4181 (-2341)
Mississippi	4719 (-2879)

Sample Tops:

Heebner	3998 (-2158)
Lansing	4178 (-2338)
Mississippi	4714 (-2874)

The undersigned, GRAHAM-MESSMAN-RINEHART DRILLING COMPANY, hereby certifies that the above log is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Report.

GRAHAM-MESSMAN-RINEHART DRILLING COMPANY

By: J. A. Gilliland
J. A. Gilliland

Subscribed and sworn to before me this
14th day of December 1954.

J. A. Gilliland
Notary Public

My Commission Expires: November 5, 1958

NO. 1 LENKNER "A"

Location: 75' SE of Ctr of SE/4
 Section 24-33S-14W
 Barber County, Kansas

SUPPLEMENTAL REPORT - Cable Tool Unit Activity

- 12-17-54 Moved in cable tool unit. Drilled out cement to 4827'. Ran Lane-Wells log.
- 12-18-54 Perf 4786-98' w/36 shots. Acidized w/3000 gals. Swb 1 bbl acid wtr and 15 GOPH.
- 12-19-54 Set plug at 4778'. Perf 4759-65' w/18 shots. Acidized w/2000 gals. Swb 1/2 BO and 1/2 BFPH (acid wtr) with SS/gas.
 Set plug at 4750'. Perf 4737-42' w/15 shots. Swb 38 GOPH.
- 12-20-54 Fraced w/5000# sand, 3500 gals. frac oil. Maximum pressure - 2800#. Swb 2 1/2 BOPH. Recovered 237 bbls load oil, 48 bbls. to recover.
- 12-21-54 Swb 1 BFPH, 16% wtr. Had 11 bbls load oil to recover.
- 12-22-54 Squeezed perfs 4737-42' w/200 sacks cement. Standing pressure - 3500#. WOC (Shut down until 12-27-54)
- 12-27-54 Drilled retainer (4684'). Drilled out cement to 4744'.
- 12-28-54 Reperforated 4737-42' w/10 shots.
- 12-29-54 Fraced w/5000# sand, 4000 gals frac oil, 200 gals mud acid, 152 bbls flush oil (total load 252 bbls.) Pressure 2800-2900#.
- 12-30-54 Swb 2 BOPH. Recovered 189 bbls load oil, 63 bbls to recover.
- 12-31-54 Set plug at 4730'. Perf 4723-25'. Swb 1 BOPH, 50,000 cfg. After 12 hrs had decreased to 16 GOPH. Drilled plug at 4730' and swb both zones (4723-25' and 4737-42'). No increase.
- 1-1-55 Set plug at 4686'. Perf Marmaton 4666-74'. Swb 5 BOPH, 1/2 mil. cfg, natural, for 5 hrs.
- 1-2-55 Acidized w/1000 gals. Recovered load. Well did not flow. Swb 16 BOPH thru tubing. Fluid level 2500'.
- 1-3-55 Completed cable tool work. To set pump.

RECEIVED
 STATE CORPORATION COMMISSION

MAR 19 1962
 3-19-62
 CONSERVATION DIVISION
 Wichita, Kansas