

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202


Barber County. Sec. 23 Twp. 33S Rge. 14 EXW
Location as "NE/CNW 1/4 SW 1/4" or footage from lines C E/2 W/2 NE/4
Lease Owner Kansas Crude, Inc.
Lease Name Baier Well No. 1
Office Address 404 Wolcott Bldg., Hutchinson, Ks. 67501
Character of Well (Completed as Oil, Gas or Dry Hole) dry hole

Date Well completed 6/8 1977
Application for plugging filed 6/8 1977
Application for plugging approved 6/8 1977
Plugging commenced 6/8 1977
Plugging completed 6/8 1977

Reason for abandonment of well or producing formation
no commercial quantities of oil or gas encountered
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____
Show depth and thickness of all water, oil and gas formations.

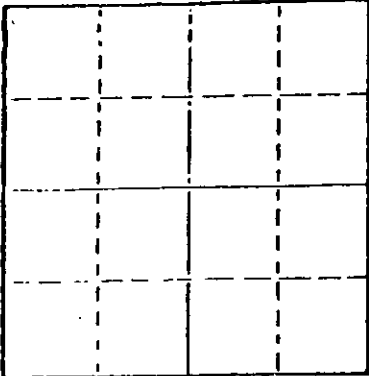

Locate well correctly on above Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
surface hole	shale	surf.	1063	8-5/8'	1055	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

RECEIVED
STATE CORPORATION COMMISSION

JUN 13 1977
6-13-77
CONSERVATION DIVISION
Wichita, Kansas

Plug @ 1063' with 20 sx
Plug @ 200' with 20 sx
Solid bridge @ 40' with 10 sx
2 sx in rat hole

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor D.N.B. DRILLING, INC.
515 R. H. Garvey Building

Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.
JAMES L. DONELSON (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

James L. Donelson
515 R.H. Garvey Bldg., Wichita, Ks. 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of June, 1977

Ella Priess

My commission expires 8/25/80

Ella Priess

Notary Public.



ELLA PRIESS
Sedgwick County, Ks.
My Appt. Exp. Aug. 25, 1980

DRILLERS' LOG

Kansas Crude, Inc.
No. 1 Baier
C E/2 W/2 NE/4, Sec. 23-33S-14W
Barber Co., Kansas

Elev: 1887 GL
1892 KB

Commenced: 5-27-77
Completed: 6-9-77

Surface casing: 1055' of 8-5/8"
cemented w/100 sx common cement,
2% gel, 3% cc. 5-28-77

<u>FORMATION</u>	<u>DEPTH</u>
Surface Clay, Sand & Red Bed	0 - 600
Sand & Shale	600 - 1074
Shale	1074 - 1139
Red Bed & Shale	1139 - 1280
Shale	1280 - 1650
Shale & Lime	1650 - 2345
Lime & Shale	2345 - 4100
Lime	4100 - 4300
Lime & Shale	4300 - 4616
Lime	4616 - 4730
Lime & Shale	4730 - 4830
Lime	4830 - 4873
Lime & Shale	4873 - 4905
Lime	4905 - 5264 RTD

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me this 10th day of June, 1977.

Ella Priess
Ella Priess, Notary Public

RECEIVED
STATE CORPORATION COMMISSION

JUN 13 1977
6-13-77
CONVENTION DIVISION
Wichita, Kansas

ELLA PRIESS
Sedwick County, Kas.
My Exp. Aug. 25, 1980

ELLA PRIESS
Sedwick County, Kas.
My Exp. Aug. 25, 1980