


15-185-20563-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

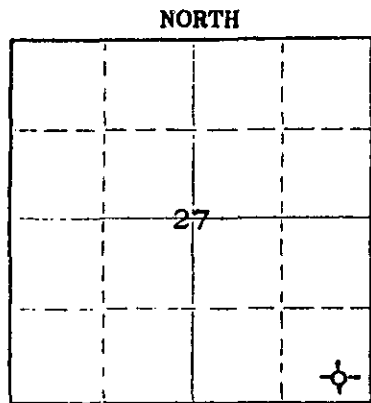

Locate well correctly on above Section Plat

Stafford County, Sec. 27 Twp. 24S Rge. 13W 24S (W)
Location as "NE/CNW/SE" or footage from lines SE SE SE
Lease Owner D. R. Lauck Oil Company, Inc.
Lease Name Wilson "A" Well No. 1
Office Address 301 S. Broadway, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed March 12, 1975
Application for plugging filed March 12, 1975
Application for plugging approved March 12, 1975
Plugging commenced March 12, 1975
Plugging completed March 12, 1975
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4218 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0'	320'	8-5/8"	320'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

4218'-500' - Hole filled with mud & hulls.
500'-496' - Plug
496'-300' - Cement, 40 sacks.
300'-296' - Plug
296'-40' - Cement, 35 sacks.
40'-36' - Plug
36'-6' - Cement, 15 sacks.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Halliburton Cementing Co.
Address Great Bend, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
John D. Knightley (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *John D. Knightley*
301 S. Broadway, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 18th day of March, 1975

My commission expires March 12, 1979 *Stalling Lips* Notary Public.

RECEIVED
STATE CORPORATION COMMISSION
MAR 19 1975
3-19-75
CONSERVATION DIVISION
Wichita, Kansas

15-185-20563-00-00

D. R. Lauck Oil Company, Inc.

Wilson "A" #1

SE SE SE 27-24S-13W
Stafford County, Kansas

Commenced: February 26, 1975

Completed: March 12, 1975

Casing Record: 320' 8-5/8" Cemented with 275 sacks Cement,
2% Gel, 3% Calcium Chloride.

Elevation: GL 1924; DF 1927; KB 1929.

Drillers Log

Clay & Sand	160
Shale	768
Anhydrite	775
Shale & Shells	1750
Shale & Lime	2100
Lime & Shale	3110
Lime	4218 RTD

RECEIVED
STATE CORPORATION COMMISSION
MAR 19 1975
CONSERVATION DIVISION
Wichita, Kansas