

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGIN
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-207-28489-00-00
Spot: SWSWSW Sec/Twnshp/Rge: 19-25S-17E
330 feet from S Section Line, 330 feet from W Section Line
Lease Name: WEBER Well #: KJS2-11
County: WOODSON Total Vertical Depth: 1230 feet

Operator License No.: 34224
Op Name: RED CLOUD EXPLORATION OPERATI
Address: 22287 MULHOLLAND HWY #350
CALABASAS, CA 91302

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	45		8 SX

Well Type: DH UIC Docket No: Date/Time to Plug: 02/19/2013 12:00 AM
Plug Co. License No.: 34283 Plug Co. Name: WILLIS WELL SERVICE LLC
Proposal Rcvd. from: Company: Phone:

Proposed
Plugging
Method:

Plugging Proposal Received By: WitnessType: NONE
Date/Time Plugging Completed: 02/19/2013 8:00 AM KCC Agent: RYAN DULING

Actual Plugging Report:

Ran 2 3/8" tubing to TD. Mixed and pumped gel through the 2 3/8" tubing at TD. Spotted 10 sacks of cement through the 2 3/8" tubing at TD. Pulled 2 3/8" tubing up to 830'. Spotted 10 sacks of cement at 830'. Pulled up to 580'. Spotted 10 sacks of cement at 580'. Pulled tubing up to 350'. Circulated cement from 350' to surface. Pulled the 2 3/8" tubing out of the hole and topped the well off with cement.

Perfs:

RECEIVED

FEB 18 2014

KCC Chanute Dist. #3

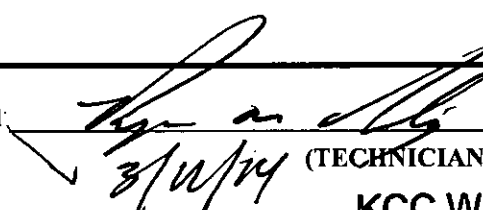
RD

Remarks:

Plugged through: TBG

District: 03

Signed:


3/10/14 (TECHNICIAN)

KCC WICHITA

FEB 20 2014

RECEIVED