
15-033-00013-00-01 Form CP-3 Rev. 6-26-62

KANSAS STATE CORPORATION COMMISSION

J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

INV. NO. _

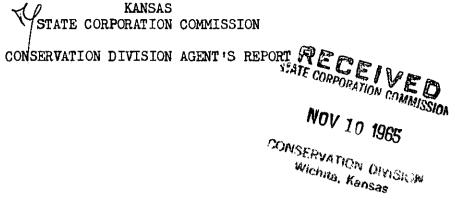

Operator's Full Name Graham-Michael:	is Drilling Company
Complete Address: 211 N. Broadway,	Wichita, Kansas
Lease Name Kennedy	Well No. # 1-2
Location C NE NE	Sec. 2 Twp. 31 Rge. 17 (E) (W) W
County Comanche	Total Depth 5145'
Abandoned Oil Well Gas Well X In	nput WellD & A
Other well as hereafter indicated:	
	ing Pulling Company
Address: Box 364, Great Bend, Kar	nsas License No. 399
Operation Completed: Hour11:45AMDay 5th Month Nov. Year 1965	
The Above well was plugged as follows:	
300' of 8 5/8" surface pipe, cemented with 200 sacks. 5141' of $4\frac{1}{2}$ " long	
string, cemented with 150 sacks. Top perferation 4960'. Bottom of the hole	
was sanded to 4950', and cemented with 3 sacks. 1215' of 42" long string	
was recovered from the hole. Fluid was up in the hole. Bridge plug was pushed	
in fluid to 290', rock bridge from 290' to 280'. 5 sacks of cement was mixed	
in a barrel, and put on plug at 280', through the dump bailer, and let set	
over-night. Next morning hole was	s bailed dry, and filled with 3 3/4 yards of
on ready-mix cement, from the plu	ug to the base of the cellar.
I hereby certify that the above well was	plugged as herein stated.
INVOICED	Signed: Chin Elving Well Plugging Supervisor
114 4 0 1 0 2 5	