

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-167-06680-00-00  
Spot: SWNWSW Sec/Twnshp/Rge: 26-14S-13W  
1650 feet from S Section Line, 4950 feet from E Section Line  
Lease Name: LETSCH WILLIAM Well #: 2  
County: RUSSELL Total Vertical Depth: 3101 feet

Operator License No.: 6246  
Op Name: BENNETT & SCHULTE OIL CO., A GEN  
Address: PO BOX 329  
RUSSELL, KS 67665

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	3085		200 SX
SURF	10.75	286		225 SX

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 02/13/2014 11:30 AM  
Plug Co. License No.: 33771 Plug Co. Name: ULTIMATE WELL SERVICE, LLC  
Proposal Rcvd. from: JOE ROTH Company: BENNETT AND SHULTE OIL Phone: (785) 623-3543

Proposed Plugging Method: Ordered 260 sx 60/40 pozmix 4% gel cement, 7 sx gel and 500 # hulls. Lans-2805

Plugging Proposal Received By: PAT STAAB WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 02/13/2014 5:10 PM KCC Agent: PAT STAAB

Actual Plugging Report:

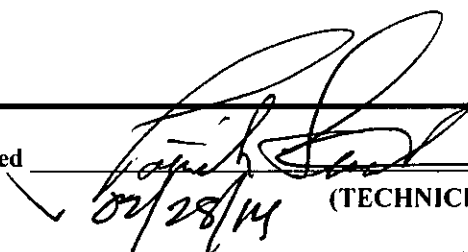
Perfs:

Pioneer Energy Service perforated at 1250', 638' and 275'. Ultimate Well Service ran in hole with tubing to 2968'. Quality rigged to tubing and pumped 7 sx gel followed by 50 sx cement w/200 # hulls mixed in. Pulled tubing to 1250'. Quality rigged to tubing and mixed and pumped 100 sx cement w/300 # hulls to circulate cement up 4 1/2" casing. Pulled tubing. Rigged to 4 1/2" casing with a swedge and pumped 5 sx cement to pressure w/200 psi and 200 psi shut in pressure. Rigged to 10 3/4" casing and pumped 2 sx cement to pressure with 200 psi and 200 psi shut in pressure.  
  
GPS: 38.80290 -098.74276  
1603' FSL 4988' FEL  
SW SW NW SW

Remarks: QUALITY OILWELL CEMENTING TICKET # 7067

Plugged through: TBG

District: 04

Signed  (TECHNICIAN) CM

KCC WICHITA Form CP-2/3

FEB 18 2014

FEB 24 2014

RECEIVED