

NOTICE OF INTENTION TO DRILL

ALL BLANKS MUST BE FILLED

Must be approved by the K.C.C. five (5) days prior to commencing well

Expected Spud Date December 3, 1990 ****** 100'N & 100'W of East
December 3, 1990 ****** .C.-NE, NE, Sec 21, Twp 31, S, Rg 17, X West
 month day year ****** 4720 feet from South line of Section
****** 760 feet from East line of Section

OPERATOR: License # 5178
 Name: SIDWELL OIL & GAS, INC.
 Address: P. O. Box 2475
 City/State/Zip: Pampa, Texas 79065
 Contact Person: Cliff Sanders
 Phone: 806/669-3383

County: Comanche
 Lease Name: Peppard Well #: 2-21
 Field Name: Unknown

Is this a Prorated Field? yes X no
 Target Formation(s): Miss.
 Nearest lease or unit boundary: 760'
 Ground Surface Elevation: 2021 feet MSL

CONTRACTOR: License #: 5929
 Name: DUKE DRILLING CO., INC.

Well Drilled For: Well Class: Type Equipment:
X Oil ... Inj ... XInfield ... X Mud Rotary
 ... Gas ... Storage ... Pool Ext. ... Air Rotary
 ... OWWO ... Disposal ... Wildcat ... Cable
 ... Seismic; ... # of Holes

Domestic well within 330 feet: yes X no
 Municipal well within one mile: yes X no
 Depth to bottom of fresh water: 180'
 Depth to bottom of usable water: 240'
 Surface Pipe by Alternate: X 1 2
 Length of Surface Pipe Planned to be set: 600'
 Length of Conductor pipe required: None
 Projected Total Depth: 5200'
 Formation at Total Depth: Mississippi
 Water Source for Drilling Operations:
 ... well ... farm pond X other

If OWWO: old well information as follows:
 Operator: _____
 Well Name: _____
 Comp. Date: _____ Old Total Depth _____

Directional, Deviated or Horizontal wellbore? yes X no
 If yes, total depth location: _____

DWR Permit #: _____
 Will Cores Be Taken?: yes X no
 If yes, proposed zone: _____

****WAS:** C-NE NE 660' from boundary
4620' FSL 660' FEL 209' Elev.

AFFIDAVIT

The undersigned hereby affirms that the drilling, completion and eventual plugging of this well will comply with K.S.A. 55-101, et. seq.

- It is agreed that the following minimum requirements will be met:
1. The appropriate district office shall be notified before setting surface pipe;
 2. The minimum amount of surface pipe as specified above shall be set by circulating cement to the top; in all cases surface pipe shall be set through all unconsolidated materials plus a minimum of 20 feet into the underlying formation;
 3. If the well is dry, a plugging proposal shall be submitted to the district office. An agreement between the operator and the district office on plug length and placement is necessary prior to plugging;
 4. The appropriate district office will be notified before well is either plugged or production casing is cemented in;
 5. If an Alternate II completion, production pipe shall be cemented from below any usable water to surface within 120 days of spud date. In all cases, notify district office prior to any cementing.

I hereby certify that the statements made herein are true and to the best of my knowledge and belief.
 Date: 12/4/90 Signature of Operator or Agent: Sally S. Rogers Title: Agent

FOR KCC USE:

API # 15- 033-20,800-00-00
 Conductor pipe required None feet
 Minimum surface pipe required 260 feet per Alt. X
 Approved by: OMIG 10-22-90 Conservation 12-5-90 DC
 EFFECTIVE DATE: 10-27-90
 This authorization expires: 4-22-91
 (This authorization void if drilling not started within 6 months of effective date.)
 Spud date: _____ Agent: _____

RECEIVED
STATE CORPORATION COMMISSION

DEC 5 1990

CONSERVATION DIVISION
Wichita, Kansas

REMEMBER TO:

- File Drill Pit Application (form CDP-1) with Intent to Drill;
- File Completion Form ACO-1 within 120 days of spud date;
- File acreage attribution plat according to field proration orders;
- Notify appropriate district office 48 hours prior to workover or re-entry;
- Submit plugging report (CP-4) after plugging is completed;
- Obtain written approval before disposing or injecting salt water.

21
31
176


PLAT OF ACREAGE ATTRIBUTABLE TO A WELL

State Corporation Commission, Conservation Division
200 Colorado Derby Bldg. Wichita, Kansas 67202

OPERATOR <u>SIDWELL OIL & GAS, INC.</u>	LOCATION OF WELL:
LEASE <u>Peppard</u>	<u>4720</u> feet north of SE corner
WELL NUMBER <u>2-21</u>	<u>760</u> feet west of SE corner
FIELD <u>Unknown</u>	<u>NE/4</u> Sec. <u>21</u> T <u>31S</u> R <u>17</u> N /W
	COUNTY <u>Comanche</u>
NO. OF ACRES ATTRIBUTABLE TO WELL <u>10</u>	IS SECTION <u>X</u> REGULAR <u> </u> IRREGULAR?
DESCRIPTION OF ACREAGE <u>NE/4</u>	IF IRREGULAR, LOCATE WELL FROM NEAREST CORNER BOUNDARY.

NOTE: If plat depicted is insufficient for your circumstances, you may attach your own scaled or surveyed plat.

PLAT

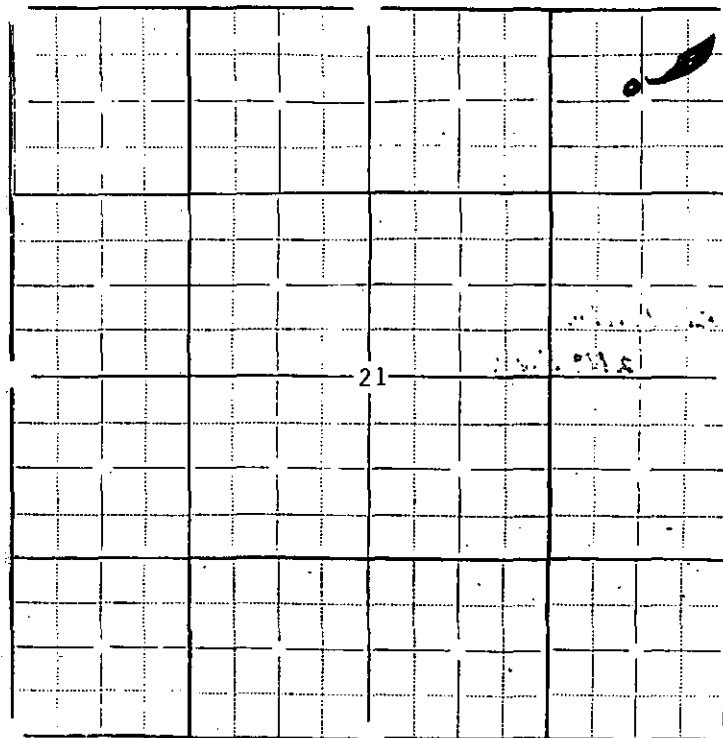

In plotting the proposed location of the well, you must show:

- 1) The manner in which you are using the depicted plat by identifying section lines, i.e. 1 section, 1 section with 8 surrounding partial sections, 4 sections, 16 sections, etc.;
- 2) the well's location relative to the location of other wells producing from the same common source of supply in adjoining drilling units, pursuant to K.A.R. 82-3-108, 82-3-207, 82-3-312, or special orders of the Commission;
- 3) the distance of the proposed drilling location from the section's east and south lines; and
- 4) the distance to the nearest lease or unit boundary line.

I hereby certify that the statements made herein are true and to the best of my knowledge and belief.

Signature of Operator or Agent Sally H. Byers
Date December 4, 1990 Title Agent