


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Pawnee County, Sec. 6 Twp. 20S Rge. (E) 16 (W)

Location as "NE/CNW/SW" or footage from lines. SE NW SE
Lease Owner Appleton Oil Company
Lease Name Folkerts Well No. 1
Office Address 506 Beacon Building, Tulsa, Oklahoma 74103
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 13 19 69
Application for plugging filed October 13 19 69
Application for plugging approved October 13 19 69
Plugging commenced October 13 19 69
Plugging completed October 13 19 69
Reason for abandonment of well or producing formation Dry Hole

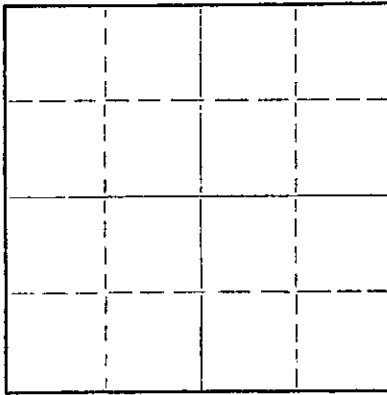

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3830 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	297	nine

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged with 100 sacks 50/50 Pozmix 6% gel.

RECEIVED
STATE CORPORATION COMMISSION
OCT 20 1969
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Leben Drilling, Inc.
Address Box 486, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.
Leslie Kite (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite
Box 486, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 17th day of October, 1969
My commission expires April 1, 1971
Ulanda Nichols
Notary Public.



DRILLER'S LOG

COMPANY	APPLETON OIL COMPANY
CONTRACTOR	LEBEN DRILLING, INC.
FARM	FOLKERTS #1
LOCATION	SE NW SE SECTION 6-20S-16W PAWNEE COUNTY, KANSAS
COMMENCED	10-6-69
COMPLETED	10-13-69

0	299	Shale, Clay
299	315	Shale
315	380	Sand
380	500	Shale, Red Bed
500	650	Sand Oak
650	850	Shale, Red Bed
850	1105	Shale, Red Bed
1105	1131	Anhydrite
1131	1895	Shale, Lime
1895	2155	Lime, Shale
2155	2385	Lime
2385	2555	Lime, Shale
2555	2935	Shale, Lime
2935	3365	Lime, Shale
3365	3765	Lime
3765	3814	Conglomerate
3814	3830	Lime
	<u>3830</u>	<u>RTD</u>

RECEIVED
STATE CORPORATION COMMISSION
OCT 20 1969
CONSERVATION DIVISION
Wichita, Kansas

8 5/8" 20# new surface casing set @ 297' cemented with 210 sacks Common cement, 2% cc.

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Folkerts #1 Well, located SE NW SE of Section 6, Township 20 South, Range 16 West, Pawnee County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite
Leslie Kite

STATE OF KANSAS)
) SS
COUNTY OF BARTON)

Subscribed and sworn to and before me, a Notary Public, in and for Barton County, Kansas, this 17th day of October, 1969.

Ulanda Nichols
Ulanda Nichols

