


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

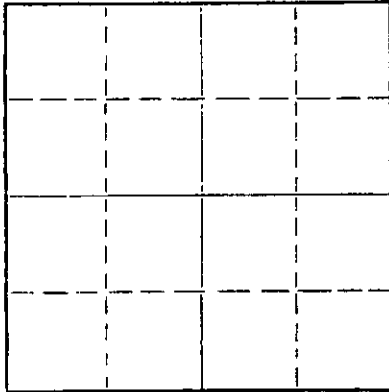

Locate well correctly on above
Section Plat

Barber County. Sec. 18 Twp. 34 Rge. (S) 12 (W)
Location as "NE/CNWxSWx" or footage from lines SE NW SE
Lease Owner Santa-Fe Pipe & Supply, Inc.
Lease Name R. B. Cook Well No. 1
Office Address Box 562, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) gas
Date well completed 19
Application for plugging filed November 13 19 67
Application for plugging approved November 14 19 67
Plugging commenced November 14 19 67
Plugging completed November 20 19 67
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Herman Justus
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4850 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	322'	none
				4-1/2"	4846'	3931.40'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

4850' to 4846' - plug
4846' to 4800' - sand
4800' to 4752' - 4 sacks cement
4752' to 300' - mud
300' to 290' - rock bridge
290' to 215' - 25 sacks cement
215' to 40' - mud
40' to 30' - rock bridge
30' to base - 10 sacks cement

RECEIVED
STATE CORPORATION COMMISSION
DEC 5 1967
12-5-67
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Santa-Fe Pipe & Supply, Inc.,
Address Box 562, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
T. L. Nutt (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) _____
P. O. Box 562, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of December, 1967

My commission expires July 31, 1970
Mary M. Sweeney Notary Public.

15-007-3087-0000

COPY


WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company **K W B OIL PROPERTY**
Farm **Cook** No. **1**

SEC. 18 T. 34 R. 12W
SE NW SE

Total Depth. **4848**
Comm. **2-4-65** Comp. **2-15-65**
Shot or Treated.
Contractor. **Bowers**
Issued. **5-8-65**

County **Barber**
KANSAS



Elevation. **1591' KB**

Production. **8800 MCFGPD**

CASING:

8 5/8" 330'

Figures indicate Bottom of Formations.

surface	330
red rock & shale	385
red rock	1285
shale & shells	1345
shale & lime	2156
lime	4553
lime & shale	4630
lime	4768
lime & chert	4825
lime, chert & shale	4848
TD	

TOPS: Scout

Elgin Zone	3654
" Sand	3665
Heebner	3894
Toronto	3905
Douglas	3952
Lansing	4098
Kansas City	4390
Base Kansas City	4632
Marmaton	4662
Mississippi	4794

RECEIVED
NOV 16 1967
11-16-67
CONSERVATION DIVISION
Wichita, Kansas