


15-007-20247-000

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

### WELL PLUGGING RECORD

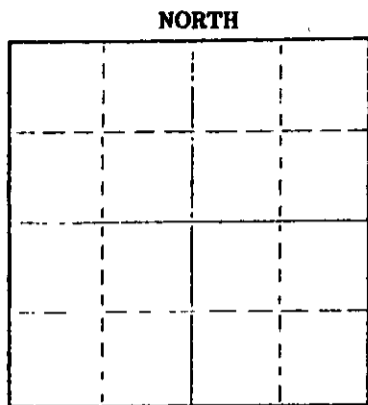

Locate well correctly on above Section Plat

Barber County, Sec. 25 Twp. 30 Rge. 13W (E) (W)  
 Location as "NE/CNW/SW" or footage from lines SE SE NW  
 Lease Owner Will P. Ash  
 Lease Name Smith Well No. 1  
 Office Address 507 Rutland, Wichita, Kansas 67206  
 Character of Well (completed as Oil, Gas or Dry Hole) oil  
 Date well completed 11-5-19 73  
 Application for plugging filed 11-1-19 75  
 Application for plugging approved 11-3-19 75  
 Plugging commenced 11-11-19 75  
 Plugging completed 12:30 11-15-19 75  
 Reason for abandonment of well or producing formation Not Productive  
 If a producing well is abandoned, date of last production 19  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstien  
 Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4420  
 Show depth and thickness of all water, oil and gas formations.

#### OIL, GAS OR WATER RECORDS

#### CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				13 3/8	196	None
				4 1/2	4419	3506

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.  
 Dumped in sand. Sand from 4419' to 4340'  
 4 sacks cement with dump bailer from 4340' to 4300'.  
 Ripped pipe at 3506'. Pulled 4 1/2"  
 Wooden bridge at 140'.  
 Rock from 140' to 130'.  
 6 yards of ready mix to surface.

RECEIVED  
STATE CORPORATION COMMISSION

NOV 18 1975

CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor Clarke Corporation, Box 187, Medicine Lodge, Kansas 67104  
 Address \_\_\_\_\_

STATE OF Kansas COUNTY OF Barber ss.  
Elmer R. Margenstern (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Elmer R. Margenstern  
Medicine Lodge, Kansas  
 (Address)

SUBSCRIBED AND SWORN TO before me this 17th day of November, 1975

My commission expires April 4, 1978  
Jessie Hamilton  
 Notary Public.