


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Plat

Comanche County, Sec. 29 Twp. 31S Rge. (E) 17 (W)
Location as "NE/CNW&SW" or footage from lines 663.1' FNL & 1977.8' FEL
Lease Owner Anadarko Production Company
Lease Name Uhl "B" Well No. 1
Office Address Box 351, Liberal, Kansas 67901
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 18, 1970
Application for plugging filed October 20, 1970
Application for plugging approved October 20, 1970
Plugging commenced October 17, 1970
Plugging completed October 18, 1970
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. G. R. Biberstein Attica, Kansas
Producing formation Depth to top Bottom Total Depth of Well 5121 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	413'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Spotted 40 sacks cement @ 650'
Spotted 40 sacks cement @ 350'
Spotted 15 sacks cement 40' to surface
Hole filled with mud between all plugs.

RECEIVED
STATE CORPORATION COMMISSION
OCT 29 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Bowers Drilling Company
Address Wichita, Kansas


STATE OF KANSAS, COUNTY OF SEWARD, ss.
V. K. DOWNEY (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. K. Downey
V. K. Downey (Address)

SUBSCRIBED AND SWORN TO before me this 30 day of October, 1970

My commission expires April 20, 1972

Notary Public.

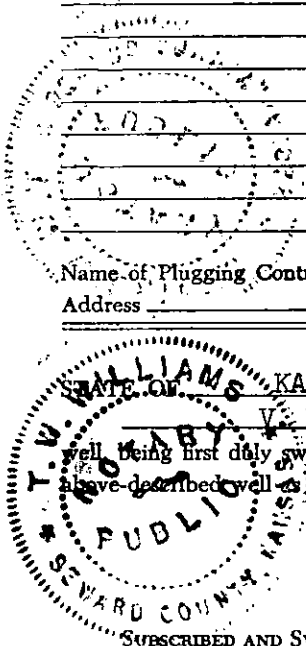

DRILLER'S LOG

WELL NAME Uhl "B" No. 1 COMPANY OPERATING Anadarko Production Company
 ADDRESS OF COMPANY Box 351, Liberal, Kansas 67901
 WELL LOCATION C $\frac{1}{4}$ NW $\frac{1}{4}$ NE $\frac{1}{4}$
Ft. North of South Line,
Ft. East of West Line, Sec. 29, Twp. 31S, Rge. 17W, Comanche County, Kansas
 DRILLING STARTED 10-6, 19 70, DRILLING COMPLETED 10-18, 19 70
 WELL COMPLETED 10-18, 19 70, WELL CONNECTED _____, 19 _____
 ELEVATION 1981.0 Ft. Ground Level CHARACTER of WELL (Oil, Gas, Dry Hole) Dry Hole

OIL OR GAS SANDS OR ZONES - PERFORATIONS - ACIDIZING AND FRACTURING INFORMATION					
Name	From	To	No. of Shots	Gallons Used	Kind Used

RECEIVED
 STATE CORPORATION COMMISSION
 OCT 29 1970
 CONSERVATION DIVISION
 Wichita, Kansas

CASING RECORD

Size	Amount Set	Sacks of Cement	Amount Pulled
8 5/8	413'	325	None

FORMATION RECORD

Formation	Top	Bottom	Formation	Top	Bottom
Sand & Red Bed	0	105			
Red Bed	105	918			
Shale	918	1635			
Shale & Lime	1635	2387			
Lime	2387	2890			
Shale	2890	3075			
Shale & Lime	3075	3515			
Lime	3515	3745			
Shale & Lime	3745	4365			
Lime & Shale	4365	4510			
Shale & Lime	4510	4625			
Lime	4625	5121			
Total Depth	5121				

RESULTS OF INITIAL PRODUCTION TEST: D & A