

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-033-20190-00-01
Spot: S2 Sec/Twnshp/Rge: 3-31S-17W
1320 feet from S Section Line, 2590 feet from E Section Line
Lease/Unit Name: HALTOM Well Number: 1 OWW
County: COMANCHE Total Vertical Depth: 5400 feet

Operator License No.: 6039
Op Name: L.D. DRILLING, INC.
Address: RR 1 BOX 183B WEST 10TH STREET
GREAT BEND, KS 67530

Conductor Pipe: Size feet: \$175.50
Surface Casing: Size 8.625 feet: 901
Production: Size 4.5 feet: 5241 WITH 210 SX CMT
Liner: Size feet:

Well Type: DH UIC Docket No: Date/Time to Plug: 12/31/2002 10:35 AM

Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.

Proposal Rcvd. from: MONTE ANDREWS Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 4800' & 4 SX CMT. PLUG AT 950' WITH 10 SX GEL & 50 SX CMT. PLUG AT 400' WITH 40 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY

Witness Type: Plugging Operations 100% Witnessed (Complete)

Date/Time Plugging Completed: 12/31/2002 11:45 AM

KCC Agent: STEVE MIDDLETON

Actual Plugging Report:

PBTD 5377'. PERFS AT 4856-62'. SAND TO 4800' & 4 SX CMT ON TOP. 1ST PLUG AT 960' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 400' WITH 40 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT CIRCUALTED TO SURFACE. STAYED FULL

RECEIVED


JAN 06 2003

KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 4010' OF 4 1/2" CASING

Plugged through: CSG

District: 01

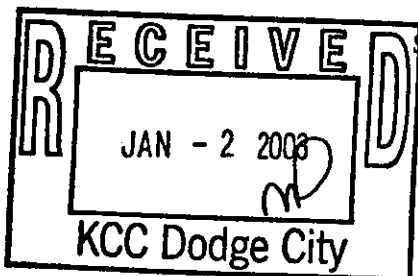

Signed

Steve Middleton

(TECHNICIAN)

INVOICED

DATE 1-7-03

INV. NO. 2003061043

Form CB 2