

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-191-01487-00-00  
Spot: NESWSE Sec/Twnshp/Rge: 35-30S-2W  
990 feet from S Section Line, 1650 feet from E Section Line  
Lease Name: RENNER Well #: 4  
County: SUMNER Total Vertical Depth: 4615 feet

Operator License No.: 31822  
Op Name: JOLEN OPERATING COMPANY  
Address: 100 N BROADWAY AVE STE 2460  
OKLAHOMA CITY, OK 73102

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5	4315		450 SX
SURF	9.625	534		450 SX

Well Type: SWD UIC Docket No: D05217.0 Date/Time to Plug: 03/27/2014 12:00 AM  
Plug Co. License No.: 34879 Plug Co. Name: CANAAN WELL SERVICE INC.  
Proposal Rcvd. from: RICK Company: JOLENE OPERATING CO Phone:

Proposed Plugging Method: RUN TUBING TO 4015', SPOT 75 SXS CEMENT. PULL TUBING TO 300' & CIRC CEMENT TO SURFACE. BACKSIDE SQUEEZED 750'-0'.

Plugging Proposal Received By: STEVE VANGIESON Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 03/27/2014 4:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

RAN TUBING TO 4015', SPOTTED 9 SXS GEL & 9 SXS HULLS. WAITED 45 MINUTES. SPOTTED 75 SXS CEMENT AT 4015', WAITED 2 HOURS, TAGGED CEMENT AT 3700'. PULLED TUBING TO 300' & CIRC CMT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
4315	4615		

KCC WICHITA


Remarks: 60/40 2% CONSOLIDATED #46256

Plugged through: TBG

APR 01 2014  
RECEIVED

District: 02

Signed

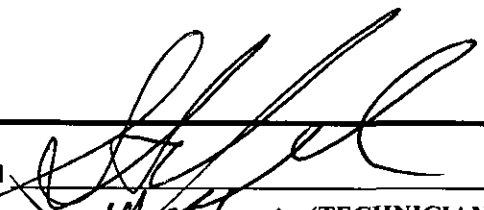

(TECHNICIAN)

cc to UIC 4/02/14