

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-095-01509-00-00
Spot: NESWSWSE Sec/Twnshp/Rge: 27-29S-7W
520 feet from S Section Line, 2090 feet from E Section Line
Lease Name: VORAN H Well #: 3D
County: KINGMAN Total Vertical Depth: 4836 feet

Operator License No.: 32215
Op Name: RAKESTRAW BROS., L.L.C
Address: 4566 NE PARALLEL RD
EL DORADO, KS 67042

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4620	2657	200 SX
SURF	8.625	265		200 SX

Well Type: SWD UIC Docket No: D08988.0 Date/Time to Plug: 03/20/2014 12:00 AM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: EDGAR SANCHEZ Company: AMIGO WELL SERVICE Phone:

Proposed Plugging Method: TUBING PARTED, FISHED FOR 3 DAYS GOT TO 2657. DECIDED TO PLUG. CASING PARTED AT 2657. PULLED & LAYED DOWN CASING, RAN BACK INTO HOLE WITH TUBING SET PLUG AT CASING PAST 70 SXS 3% CACL, TAGGED CMT PLUG PULLED TUBING TO 1150', 35 SXS 700' 35 SX CEMENT. PULLED TUBING TO 310' & CIRCULATE CEMENT TO SURFACE.

Plugging Proposal Received By: STEVE VANGIESON WitnessType: PARTIAL
Date/Time Plugging Completed: 03/20/2014 6:15 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

TUBING & CASING BOTH PARTED AT 2657'. PULLED & LAYED OUT CASING & TUBING. RAN IN WITH WORK STRING & SPOTTED 70 SXS COMMON 3% CACL AT 2657'. WAITED 2 HRS AND TAGGED PLUG 2548. PLUG OK. PULLED TUBING TO 1150' & SPOTTED 35 SXS CEMENT. PULLED TUBING TO 716' & SPOTTED 35 SXS CEMENT. PULLED TUBING TO 310' & CIRCULATE CEMENT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
4670	4836	CSG	

Remarks: ALLIED CEMENT COMMON 3% CACL

Plugged through:


KCC WICHITA

APR 01 2014

RECEIVED

District: 02

Signed

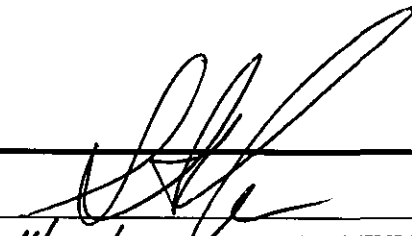

(TECHNICIAN)

4/04/14
cc to WCC 4/02/14