

15-007-30393-0000


R

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Barber County, Sec. 9 Twp. 35S Rge. 15 (E) 15 (W)
Location as "NE/CNW/SW" or footage from lines Approx. C W/2
Lease Owner K & E Drilling, Inc.
Lease Name Davis Ranch Well No. 2-9
Office Address 719 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed 1-21-65 19__
Application for plugging filed 19__
Application for plugging approved 1-25-65 19__
Plugging commenced 1-21-65 19__
Plugging completed 1-21-65 19__
Reason for abandonment of well or producing formation dry

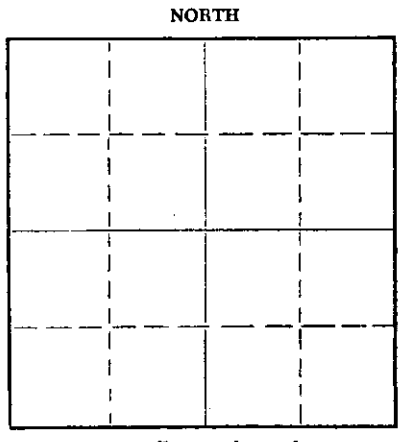

If a producing well is abandoned, date of last production 19__
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Al Elving

Name of Conservation Agent who supervised plugging of this well _____
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5210 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	1062	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole w/heavy mud to 300', set bridge of 1 sx. hulls, 2 sx. dry cement & wood plug. Cemented w/235 sx. Fill hole w/heavy mud to 40' set solid bridge of 1/3 sx. hulls, 2 sx. dry cement & wood plug. Cemented to base of cellar w/8 sx. 2 sx in rat hole. Job completed 12:30 a.m.

RECEIVED
STATE CORPORATION COMMISSION

FEB 2 1965
2-2-65
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor K & E Drilling, Inc.
Address 719 Union Center, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
H. L. Wilson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. L. Wilson
H. L. Wilson
719 Union Center, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 1st day of February, 19 65

Julene M. Bannan
XANNA Julene M. Bannan Notary Public.

My commission expires 8-30-65

DRILLER'S WELL LOG

OPERATOR: **K & E DRILLING, INC.**
 719 Union Center
 Wichita, Kansas

WELL NAME: **Devis Ranch #2-9**
 LOCATION: **Approx. C W/2**
Sec. 9-35E-15W
Barber Co., Kansas

CONTRACTOR: **K & E DRILLING, INC.**
 719 UNION CENTER BLDG.
 WICHITA, KANSAS

COMMENCED: **1-5-65**
 COMPLETED: **1-21-65**
 ELEVATION: **1805 K.B.; 1802 D.F.**
 PRODUCTION: **dry hole**

CASING RECORD: **8-5/8" @ 1062 w/575 sz.**

ROTARY TOTAL DEPTH: **5210'**

FORMATION RECORD

Depths shown indicate bottom of formations encountered.

Clay	28
Rock	40
Lost returns	45
Rock	75
Shale & Shells	409
Shale	1845
Lime & Shale	2025
Lime	2260
Lime & Shale	2480
Lime	3050
Shale & Lime	3230
Lime	4180
Shale & Sand	4330
Lime	5145
Chat	5174
Lime	5210 T.D.

RECEIVED
 STATE CORPORATION COMMISSION
 FEB 2 1965
 2-2-65
 CONSERVATION DIVISION
 Wichita, Kansas

CERTIFICATION

State of KANSAS }
 County of SEDGWICK } ss:

I, H. L. Wilson, of K&E DRILLING, INC., upon oath state that the above and foregoing is a true and correct copy of the Driller's Log of the above named well.

Subscribed and sworn to before me this 1st day of February, 1965.

H. L. Wilson
H. L. Wilson
 Notary Public.

My Commission expires: 8-30-65 Julene M. Bannon

