

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-051-21208-00-00  
Spot: SESENE Sec/Twnshp/Rge: 34-12S-20W  
2310 feet from N Section Line, 330 feet from E Section Line  
Lease Name: SCHNELLER Well #: 1  
County: ELLIS Total Vertical Depth: 3824 feet

Operator License No.: 32278  
Op Name: TENGASCO, INC.  
Address: 1327 NOOSE RD PO BOX 458  
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3824		
PROD	4.5	3872		250 SX
SURF	8.625	269		250 SX

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 02/26/2014 9:30 AM  
Plug Co. License No.: 31720 Plug Co. Name: STEWART WELL SERVICE INC  
Proposal Rcvd. from: GARY WAGNER Company: TENGASCO INC. Phone: (785) 625-6374

Proposed Plugging Method: Ordered 500 sx 60/40 pozmix 4% gel cement; 1200# hulls.; 4 bags CC.  
DV Tool at 1533' w/250 sx.  
Perforations: 3402' - 3408', 3460' - 3464', 3480' - 3666', 3862' - 3868'  
BP-3824'  
Milled from 1060' to 2050' for two days on job.

Plugging Proposal Received By: PAT STAAB WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 02/27/2014 10:30 AM KCC Agent: PAT STAAB

Actual Plugging Report:

Stewart Well Service ran in hole with tubing to 2032' and mixed and pumped 70 sx cement neat followed by 125 sx cement w/200 # hulls mixed in. No circulation of cement. Pulled tubing to 1112' and pumped 105 sx cement w/500 # hulls mixed in. No circulation of cement. Ordered 200 more sx cement and 500 # more hulls. Pumped 100 sx cement w/3% CC and 300 # hulls mixed in. Pulled tubing. No circulation of cement. Left set for 30 minutes. Pumped an additional 100 sx cement w/200 # hulls mixed in. No circulation of cement. Left set overnight. 02/27/14-Quality brought an additional 200 sx 60/40 pozmix 4% gel cement. Topped off 4 1/2" casing w/25 sx cement. Hole standing full. Rigged to 8 5/8" casing with instant pressure.

Perfs:

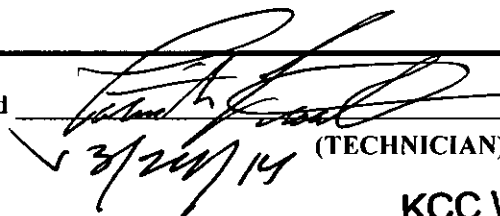
Top	Bot	Thru	Comments
3862	3868		
3480	3666		
3460	3464		
3402	3408		

Remarks: QUALITY CEMENTING CO TICKET # 7114 AND 7076

Plugged through: TBG

District: 04

Signed

  
(TECHNICIAN)

CM

KCC WICHITA

Form CP-2/3

MAR 05 2014

RECEIVED

FEB 17 2014