

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-20658-00-C
Spot: NWSE Sec/Twnshp/Rge: 10-35S-12W
2140 feet from S Section Line, 1750 feet from E Section Line
Lease/Unit Name: OHLSON A Well Number: 1
County: BARBER Total Vertical Depth: 5391 feet

Operator License No.: 31881
Op Name: MCGINNESS OIL COMPANY OF KANS
Address: 150 N. MAIN, STE 1026
WICHITA, KS 67202

Production Casing Size: 4.5 feet: 5389 WITH 225 SX CMT
Surface Casing Size: 8.625 feet: 1041 Ø 175.21

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 07/23/2003 5:00 PM
Plug Co. License No.: 5105 Plug Co. Name: CLARKE CORPORATION
Proposal Rcvd. from: DOUG MCGINNESS Company: MCGINNESS OIL COMPANY Phone: (316) 267-6065

Proposed Plugging Method: SET CIBP @ 4725' & 2 SX CMT. SET CIBP @ 1030'. PERFORATE AND CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: STEVE DURRANT Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 07/23/2003 7:45 PM KCC Agent: STEVE DURRANT

Actual Plugging Report:


PERFS AT 5338-5343'. SET CIBP @ 4725' & 2 SX CMT. 1ST PLUG SET CIBP @ 1030'. 2ND PLUG PERFORATE AT 602'. CIRCULATE CMT TO SURFACE WITH 150 SX CMT.

RECEIVED
8-8-03
AUG 08 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. NO CASING RECOVERED.

Plugged through: CSG

District: 01

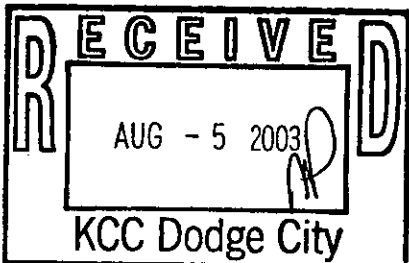

Signed

Steve Durrant
(TECHNICIAN)

INVOICED

8-8-03
20040 60383