

1 010215

FEB 24 1987

174  
R

To: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING SECTION  
200 COLORADO DERBY BUILDING  
WICHITA, KANSAS 67202

API NUMBER 15- 007-21,117-0000

SE NW NW, SEC. 14, T 35 S, R 12 W/E

4290 feet from S section line

4290 feet from E section line

TECHNICIAN'S PLUGGING REPORT

Operator License # 5187

Lease Name Achenbach Well # B-1

Operator: Silver Creek Management Corp.  
Name &

County Barber 160.03

Address 1900 North Amidon, Suite 221  
Wichita, KS 67203

Well Total Depth 4924 feet

Conductor Pipe: Size feet

Surface Casing: Size 8 5/8 feet 335

Abandoned Oil Well X Gas Well Input Well SWD Well D&A

Other well as hereinafter indicated

Plugging Contractor Silver Creek Oil & Gas, Inc. License Number 5188

Address 1900 North Amidon, Suite 211, Wichita, KS 67203

Company to plug at: Hour: 2:20 p.m. Day: 24 Month: 2 Year: 19 87

Plugging proposal received from Stan Mai

(company name) Silver Creek Oil & Gas, Inc. (phone) 316-832-0603

were: 4 1/2" at 4922' PBTD 4887' Perfs at 4842-52' Elevation 1374' GL

1st plug sand back to 4800' and dump 4 sx cement on top of sand through bailer,

2nd plug pump 3 sx hulls, 15 sx gel, 50 sx cement, 10 sx gel, 1 sx hulls, and 100 sx cement.

Plugging Proposal Received by Richard Lacey  
(TECHNICIAN)

Plugging Operations attended by Agent?: All X Part None

Operations Completed: Hour: 2:50 p.m. Day: 24 Month: 2 Year: 19 87

ACTUAL PLUGGING REPORT 1st plug sanded back to 4780' and dumped 5 sx cement on top of sand through bailer,

2nd plug pumped 3 sx hulls, 15 sx gel, 50 sx cement, 10 sx gel, 1 sx hulls, released 8 5/8" wiper plug and pumped 100 sx cement.

Maximum pressure 400 psi and shut in 350 psi.

Remarks: Used 60/40 Pozmix 6% gel by B.J. Titan. Recovered 3800' of 4 1/2" casing.  
(If additional description is necessary, use BACK of this form.)

Observe this plugging.

INVOICED

DATE 3-5-87

INV. NO. 16278

Signed Jack [Signature] (TECHNICIAN) STATE CORPORATION COMMISSION  
Wichita, Kansas  
MAR 4 1987

MAR 27 1987 MAY 14 1987

K-007-2117-0000

# Petro-Log

## Gamma Ray Neutron

COMPANY SILVERCREEK MANAGEMENT CORPORATION

WELL ACHENBACH "B" #1

FIELD \_\_\_\_\_

COUNTY BARBER STATE KANSAS

Location SE-NW-NW

Other Services:


Sec. 14 Twp. 35S Rge. 12W

PERF.

Permanent Datum: GROUND LEVEL Elev. 1374  
 Log Measured From K.B., 10 Ft. Above Perm. Datum  
 Drilling Measured From KELLY BUSHING

Elev.: K.B. 1394  
 D.F. 1383  
 G.L. 1374

Date	3/7/81				
Run No.	01E				
Depth—Driller	4887				
Depth—Logger	4887				
Bot. Log Inter.	4886				
Top Log Inter.	4600				
Casing—Driller	10 3/4 @ 35S	4 1/2 @			
Casing—Logger					
Bit Size	7 7/8				
Type Fluid in Hole	WATER				
Dens.	Visc.				
pH	Fluid Loss	ml	ml	ml	ml
Source of Sample					
R <sub>10</sub> @ Meas. Temp.	@ °F	@ °F	@ °F	@ °F	@ °F
R <sub>20</sub> @ Meas. Temp.	@ °F	@ °F	@ °F	@ °F	@ °F
R <sub>30</sub> @ Meas. Temp.	@ °F	@ °F	@ °F	@ °F	@ °F
Source: R <sub>10</sub>	R <sub>20</sub>				
R <sub>10</sub> @ BHT	@ °F	@ °F	@ °F	@ °F	@ °F
Time Since Circ.					
Max. Rec. Temp.	@ °F	@ °F	@ °F	@ °F	@ °F
Equip.   Location	H-1   G8				
Recorded By	RAMEY				
Witnessed By	MR. GARY OSOBA				

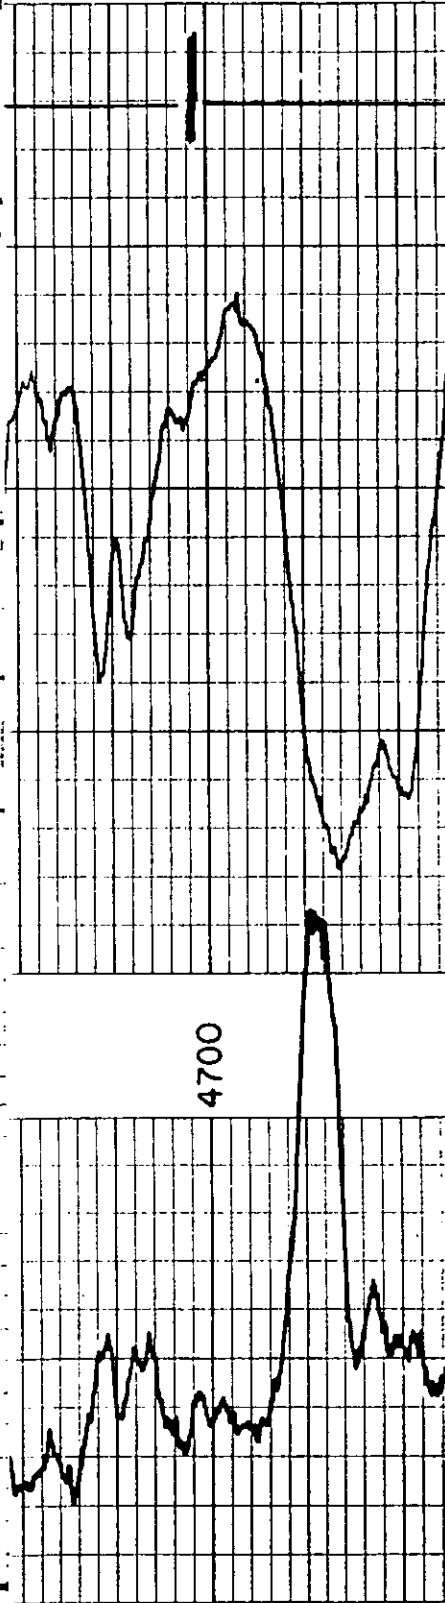

RECEIVED  
 STATE CORPORATION COMMISSION

JAN 22 1981  
 1-22-81

CONSERVATION DIVISION  
 Wichita, Kansas