

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-22717-00-00
Spot: NW Sec/Twnshp/Rge: 8-35S-14W
1320 feet from N Section Line, 1320 feet from W Section Line
Lease/Unit Name: BENSON Well Number: 1-8
County: BARBER Total Vertical Depth: 5050 feet

Operator License No.: 3080
Op Name: JACK EXPLORATION, INC.
Address: PO BOX 1279 812 W. 11TH STREET
SULPHUR, OK 73086

Conductor Pipe Size: 20 feet: 65 grout #164 13
Production Casing Size: 4.5 feet: 5046 WITH 200 SX CMT
Surface Casing Size: 8.625 feet: 252 WITH 225 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 06/24/2003 1:30 PM
Plug Co. License No.: 33062 Plug Co. Name: R & R WELL SERVICE, INC.
Proposal Rcvd. from: ALAN WATSON Company: JACK EXPLORATION Phone: (580) 621-3679

Proposed Plugging Method: CIBP @ 4600' WITH 2 SX CMT. PLUG AT 600' WITH 50 SX CMT. PLUG AT 280' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: RICHARD LACEY Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 06/24/2003 3:15 PM KCC Agent: SCOTT ALBERG

Actual Plugging Report:


PBTD 5046'. PERFS AT 4860-69 & 4638-46'. CIBP @ 4600' WITH 2 SX CMT. 1ST PLUG SPOT 10 SX GEL & 50 SX CMT AT 600'. 2ND PLUG AT 270' WITH 50 SX CMT. 3RD PLUG AT 0-40' WITH 20 SX CMT. GOOD CIRCULATION.

RECEIVED
7-7-03
JUL 07 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 4100' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

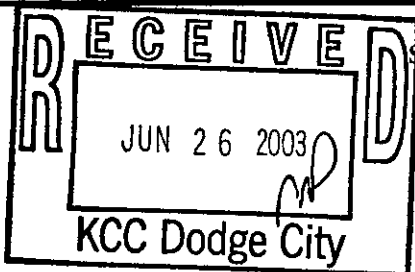

Signed _____

[Signature]
(TECHNICIAN)

INVOICED
DATE 7-7-03
INV. NO. 2004060037

Form 6-2/3
[Signature]