

STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Barber County, Sec. 16 Twp. 30S. Rge. 12W (E) (W)

Location as "NE/CNWKSWK" or footage from lines _____
Lease Owner Cameron K. Reed
Lease Name Emma House Well No. 1
Office Address Box 2, Chanute, Kansas 66720
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed May 27, 1966
Application for plugging filed August 17, 1974
Application for plugging approved August 20, 1974
Plugging commenced August 20, 1974
Plugging completed September 3, 1974
Reason for abandonment of well or producing formation Not Productive

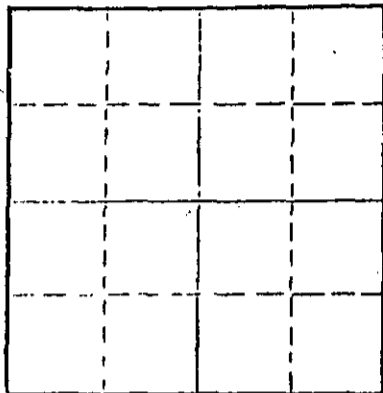

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production August 12, 1974
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4,490 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	300	None
				4 1/2	4,479	-3,643

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sand from 4479 to 4334
Pumped 4 sacks cement with Dump Bailer
Cement - from 4334 to 4300
Ripped pipe at 3800 and 3643
Built wood bridge at 200.
Rock from 190 to 200.
3 yards of Ready-mix.

RECEIVED
STATE CORPORATION COMMISSION
SEP 6 1974
7-6-74
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Clarke Corporation
Address Box 187, Medicine Lodge, Kansas 67104

STATE OF Kansas, COUNTY OF Barber, ss.
Elmo Morgenstern (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Elmo Morgenstern
Medicine Lodge, Kansas 67104
(Address)

Sworn to before me this 4th day of September, 1974

James Hamilton
Notary Public.



DRILLERS LOG

CASING RECORD: 293.97' of used 8-5/8" surface casing. COMPANY: #1 House Lawrence O. Tenk, Jr. DESCRIPTION: C/SE NE Section 16-30S-R12W Barber County, Kansas

CONTRACTOR: Strata Drilling, Inc.

TOTAL DEPTH: 4490' COMMENCED: April 22, 1966 COMPLETED: May 2, 1966

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand	0	85	Ran 293.97' of used surface casing; set and cemented at 300' with 250 sacks of regular cement, 2% gel and 3% calcium chloride. Plug down at 1:00 P. M. April 23, 1966. Cement circulated.
Red Bed & Shale	85	1000	
Shale, Shells & Red Bed	1000	1415	
Shale	1415	1544	
Anhydrite	1544	1551	
Lime & Shale	1551	2957	
Lime	2957	3025	
Lime & Shale	3025	3442	
Lime	3442	3685	
Shale, Sand & Lime	3685	3820	
Lime & Shale	3820	3916	
Lime	3916	4342	
Lime & Shale	4342	4490	

Total Depth 4490'

Ran one drill stem test.

RECEIVED
STATE CORPORATION COMMISSION
AUG 19 1974
8-19-74
CONSERVATION DIVISION
Wichita, Kansas

Ran Electra log.

Ran 145 joints of new 4 1/2" (4497.46'); set and cemented at 4479' with 100 sacks of common cement. Plug down at 11:15 A. M. May 2, 1966.

STATE OF KANSAS)
COUNTY OF BARTON) ss.

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING, INC.
J. B. McWilliams
J. B. McWilliams, Secy-Treas.

Subscribed and sworn to before me this 4th day of May, 1966.

Elaine H. Taylor
Elaine H. Taylor, Notary Public

My Commission Expires:
December 14, 1969