

15-007-20343-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Commission

P. O. Box 17027  
Wichita, Kansas 67217

Barber County, Sec 32 Twp. 30S Rge. 12 (W)

Location as "NE/CNW/ESW" or footage from lines \_\_\_\_\_  
Lease Owner: Sidwell Oil & Gas Inc.  
Lease Name: Olson Well No. 1  
Office Address: P. O. Box 2475, Pampa, Texas 79065  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed August 3, 1975  
Application for plugging filed August 3, 1975  
Application for plugging approved August 3, 1975  
Plugging commenced August 3, 1975  
Plugging completed August 3, 1975  
Reason for abandonment of well or producing formation \_\_\_\_\_

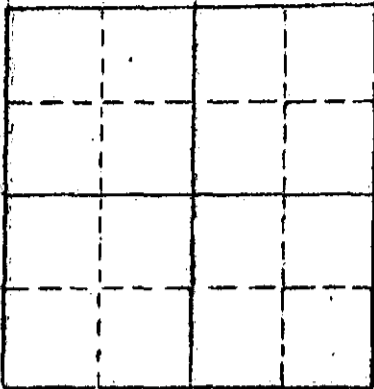

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? \_\_\_\_\_

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein, Attica, Kansas  
Producing formation: \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well \_\_\_\_\_ Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	263'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Mudded up with heavy mud to 250' feet. Followed by wooden plug and 1/2 sack hulls  
Placed 35 sacks cement onto hulls. Mudded up with heavy mud to 40 feet followed  
by wooden plug. 1/2 sacks hulls and 15 sacks cement to base of well cellar.  
Plugged rat hole with 2 sacks cement.

RECEIVED  
STATE CORPORATION COMMISSION

AUG 8 1975  
8-8-75  
CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor: Graves Drilling Co., Inc.  
Address: 910 Union Center, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick ss.

John C. Graves (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) John C. Graves  
910 Union Center, Wichita, Kansas 67202 (Address)

Subscribed and sworn to before me this 7th day of August 1975

My commission expires May 9, 1979 Betty Brandt Notary Public

15-007-20340-0000

ROTARY DRILLERS' LOG

OPERATOR: Sidwell Oil & Gas Inc. DRILLING COMMENCED: July 26, 1975  
P. O. Box 2475  
Pampa, Texas 79065

CONTRACTOR: Graves Drilling Co. Inc. DRILLING COMPLETED August 3, 1975  
910 Union Center  
Wichita, Kansas 67202

CASING RECORD: 6 Jts. 8 5/8" 263' LOCATION: Olson No. 1  
Cemented with 230 sacks C SE/4  
Section 32-30S-12W  
Barber County, Kansas

-----

0 - 70 Sand  
70 - 264 Redbed  
264 - 570 Shale & shells  
570 - 1200 Shale & shells  
1200 - 1734 Shale  
1734 - 1940 Lime  
1940 - 2195 Lime shale & sand streaks  
2195 - 2550 Shale & lime  
2550 - 2838 Lime shale & sand streaks  
2838 - 3090 Shale & lime  
3090 - 3360 Lime & shale, sand streak & some chert  
3360 - 3715 Shale & lime  
3715 - 3780 Lime  
3780 - 3861 Sand & shale  
3861 - 3865 Lime  
3865 - 3930 Sand shale & lime streaks

RECEIVED  
STATE CORPORATION COMMISSION

AUG 8 1975  
8-8-75  
CONSERVATION DIVISION  
Wichita, Kansas

3930 RTD

I hereby certify the foregoing statements to be true and correct to the best of my knowledge.

GRAVES DRILLING CO., INC.

By Phil Graves  
President

STATE OF KANSAS )  
                          ) SS:  
SEDGWICK COUNTY. )

Subscribed and sworn to before me, a Notary Public, this 7th day of August, 1975

My commission expires: May 9, 1979

Betty Brandt  
Betty Brandt Notary Public