

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

50' N  
NW-NW-SE

Coffey County, Sec. 35 Twp. 21 Rge. 13 (E)  (W)

Location as "NE/CNWxSWx" or footage from lines NW NW Se 1/4

Lease Owner Little George Oil Co.

Lessee Name Hatch Johnson "A" #1 Well No. 1

Office Address 225 Sutton Place Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed 4/19/74 19

Application for plugging filed 4/19/74 19

Application for plugging approved 4/19/74 19

Plugging commenced 4/19/74 19


Plugging completed 4/19/74 19

Reason for abandonment of well or production formation

No producing formation found.

If a producing well is abandoned, date of last production - 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

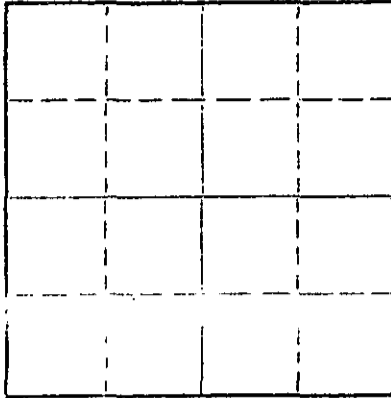

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Merle Hickey

Producing formation - Depth to top Bottom Total Depth of Well 2375 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Douglass sand	salt water	645	744	8"		0

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 3 - 1974  
CONSERVATION DIVISION  
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with rotary mud from TD to 180' and set bridge plug consisting of burlap bags and cottonseed hulls and cemented with 12 sacks cement. Filled with mud to 30' and set bridge plug as above and cemented with 6 sacks. Cemented rat hole with 2 sacks.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Jackman & Jackman

Address c/o C. R. McClelland - Madison, Kansas

STATE OF Kansas, COUNTY OF Greenwood, ss.


C. R. McClelland (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) C. R. McClelland

Madison, Kansas (Address)

20 day of April, 1974



Subscribed and Sworn to before me this August 29, 1975

Robert H. Hays Notary Public

Well log

Company: George Ahlha *(V/A)* Little George Oil Co.  
 Patch: Johnson  
 No. 1 *R*  
 Location: N. 24. of T. 21 N. Sec. 35 - 21 - 13 Coffey County, Kansas  
 Commenced: 4/12/74  
 Completed: 4/19/74  
 Contractor: Jackson & Jackson  
 Casing: 100' of 8" cemented with 100 ends  
 Production: 0 & A  
 Total depth: 2375'

RECEIVED  
 STATE CORPORATION COMMISSION  
 APR 22 1974  
 CONSERVATION DIVISION  
 Wichita, Kansas

Well	0	0
Shale	32	32
Shale & shells	32	100
Lime & shale	100	750
Shale & shells	250	130
Shale	490	490
Lime	642	648
Sand - water	642	711
Lime	711	891
Shale	993	1013
Lime	1119	1159
Shale & shells	1159	1155
Sand	1155	1515
Shale & shells	1515	1631
Shale	1631	1815
Sandy shale	1815	1834
Lime	1834	2173
Shale	2173	2200
Lime	2200	2269
Sand	2269	2299
Lime	2299	2375

0' is 4' above ground level.