

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-051-20267-00-00  
Spot: SESWESW Sec/Twnshp/Rge: 18-12S-17W  
265 feet from S Section Line, 3556 feet from E Section Line  
Lease Name: LSCHMEIDLER Well #: 3  
County: ELLIS Total Vertical Depth: 3659 feet

Operator License No.: 7383  
Op Name: GRADY BOLDING CORPORATION  
Address: 114 NORTH MAIN P.O. BOX 486  
ELLINWOOD, KS 67526

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	3646		75 SX
SURF	8.625	223		140 sx

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 03/27/2014 12:30 PM  
Plug Co. License No.: 32810 Plug Co. Name: PROFESSIONAL PULLING SERVICES LLC  
Proposal Rcvd. from: DAVE HEIN Company: GRADY BOLDING CORP Phone: (785) 623-2084

Proposed Plugging Method: Ordered 304 sx 60/40 pozmix 4% gel cement, 13 sx gel and 500 # hulls.  
LKC: 3457' - 3461', 3468' - 3472', 3452' - 3456', 3462' - 3466'  
ARB: 3646' - 3654'  
Squeezed at 783' - 846' w/200 sx cement.

Plugging Proposal Received By: PAT STAAB Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 03/27/2014 4:45 PM KCC Agent: PAT STAAB

Actual Plugging Report:

Perfs:

Perf Tech perforated at 1850' and 1375'.  
Professional Pulling ran in hole with tubing to 2900'. Quality rigged to tubing and pumped 13 sx gel followed by 50 sx cement w/200 # hulls mixed in. Pulled tubing to 1850'. Rigged to tubing and pumped 250 sx cement w/300 # hulls to circulate cement to surface. Pulled tubing. Topped off 5 1/2" casing with 5 sx cement. Hole standing full. Ran out of cement. Will top off 8 5/8" when well head is cut off.

GPS: 39.00238 -099.25423  
319' FSL 3451' FEL  
SE SW SE SW

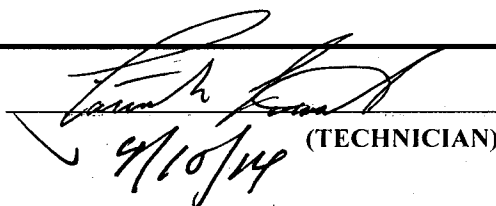
Remarks: QUALITY OILWELL CEMENTING TICKET # 7188

Plugged through: TBG

KCC WICHITA  
APR 07 2014  
RECEIVED

District: 04

Signed

  
(TECHNICIAN)

CM

MAR 28 2014