

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-033-21119-00-00
Spot: NENE Sec/Twnshp/Rge: 19-31S-19W
660 feet from N Section Line, 660 feet from E Section Line
Lease/Unit Name: ELLIS Well Number: 1-19
County: COMANCHE Total Vertical Depth: 6250 feet

Operator License No.: 32384
Op Name: COMANCHE RESOURCES COMPANY
Address: 9520 N. MAY AVENUE STE 370
OKLAHOMA CITY, OK 73120

Conductor Pipe: Size feet:
Surface Casing: Size 8.625 feet: 655 WITH 250 SX CMT
Production: Size 4.5 feet: 6250 WITH 325 SX CMT
Liner: Size feet: \$203.13

Well Type: OIL UIC Docket No: Date/Time to Plug: 05/14/2001 12:50 PM
Plug Co. License No.: 31705 Plug Co. Name: H & K PLUGGING AND SALVAGE
Proposal Rcvd. from: JIM CONNERS Company: H & K PLUGGING AND SALVAGE Phone: (806) 665-2550

Proposed Plugging Method: SET CIBP @ 5100' WITH 2 1/2 SX CMT ON TOP. 1ST PLUG AT 1050' WITH 50 SX CMT. 2ND PLUG AT 675' WITH 50 SX CMT. 3RD PLUG AT 0-40' WITH 10 SX CMT.

Plugging Proposal Received By: SCOTT ALBERG Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 05/14/2001 1:50 PM KCC Agent: STEVE MIDDLETON

Actual Plugging Report:

PBTD 6250'. PERFS AT 5145-46'. SET CIBP @ 5100' WITH 200# HULLS ON TOP. LOAD HOLE WITH MUD. 1ST PLUG RUN TUBING TO 1056' & SPOT 50 SX CMT. 2ND PLUG PULL TO 675' AND SPOT 50 SX CMT. 3RD PLUG PULL TO 30' AND PUMP 10 SX CMT.

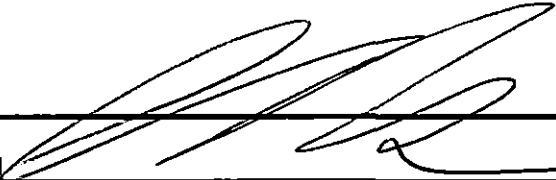
INVOICED
DATE 5-29-01
INV. NO. 2001061850

RECEIVED
KANSAS CORPORATION COMMISSION
MAY 21 2001
05-21-2001
CONSERVATION DIVISION

Remarks: USED COMMON CEMENT BY H & K PLUGGING. RECOVERED 3630' OF 4 1/2" CASING.

Plugged through: TBG

District: 01

Signed 
(TECHNICIAN)

MAY 15 2001



