

15-033-20159-0000

RECEIVED  
STATE CORPORATION COMMISSION  
18-9-74  
OCT 9 1974


FORM CP-4

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

WELL PLUGGING RECORD  
Wichita, Kansas

Comanche County, Sec. 2 Twp. 31 Rge. 18 (E) (W)

Location as "NE/CNW&SW" or footage from lines SW SW  
Lease Owner Cities Service Oil Co.  
Lease Name Toothaker "A" Well No. 1  
Office Address 209 E. William, Wichita, KS 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 9-30 19 74  
Application for plugging filed 10-8 19 74  
Application for plugging approved 10-1 19 74  
Plugging commenced 9-30 19 74  
Plugging completed 9-30 19 74  
Reason for abandonment of well or producing formation Dry Hole

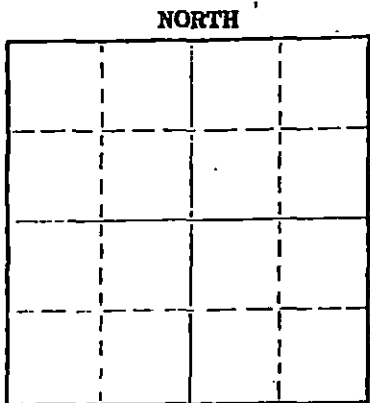

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes - Verbal

Name of Conservation Agent who supervised plugging of this well G. Russell Biberstein  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 5110 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				13 3/8"	331'	-0-
				8 5/8"	1107'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Fill up w/mud from 5110' to 800'  
40 sx. cement from 800' to 560'  
Mud from 560' to 325'  
25 sx. cement from 325' to 250'  
Mud from 250 to 40'  
10 sx. cement from 40' to base of cellar  
2" sx. cement in rat hole

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Gabbert - Jones, Inc.  
Address 830 Sutton Pl. Bldg. Wichita, KS 67202

STATE OF KANSAS COUNTY OF SEDGWICK ss.  
W. J. Devaney (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
209 E. William, Wichita, KS 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of October, 19 74

10-16-77  
Dean Caldwell  
Notary Public

15-033-20159-0000

RECEIVED  
STATE CORPORATION COMMISSION

GABBERT-JONES, INC.  
WICHITA, KANSAS  
DRILLERS' WELL LOG

OCT 9 1974  
10-9-74  
CONSERVATION DIVISION  
Wichita, Kansas

Toothaker #1  
SW-SW Sec 2-31S-18W  
Comanche County Kansas

Commenced: 9-12-74


Completed: 9-30-74

OPERATOR: CITIES SERVICE OIL CO.

From	Depth to	Formation	Remarks
0	390	Surface Sand-Clay	Ran 8 jts of New 484 13 3/8"
390	2070	Redbed	csg set @ 331' Cemented w/
2070	2281	Shale-Lime	200 sks L. W. 3% CC
2281	2603	Lime-Shale	per sack & 200 sks 50/50
2603	2738	Lime	Posmix 2% CC
2738	2860	Lime-Shale	P.D. @ 8:45 a.m. 9-14-74
2860	2964	Lime	1" to 65' Cemented w/100 sks
2964	4213	Lime-Shale	Common Job Complete
4213	4308	Lime	@ 4:00 p.m. 9-14-74
4308	4735	Lime-Shale	
4735	4803	Lime	Ran 39 jts of New 20 8 5/8"
4803	4866	Lime-Shale	csg set @ 1107' Cemented
4866	4991	Lime	w/300 sks Class A 3% CC
4991	5066	Lime-Shale	PD @ 10:15 p.m. Cemented
5066	5110	Lime	w/50 sks common
	5110 TD		0-100' Job Complete @ 10:30 P.M. 9-15-74

DRY AND ABANDONED

I, James S. Sutton II, certify this is a correct copy of the Drillers' Log for the well drilled SW-SW Sec 2-31S-18W Comanche County Kansas to the best of my Knowledge and belief.

  
JAMES S. SUTTON II

STATE OF KANSAS )  
                          ) SS  
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 3rd day of October, 1974, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and