


15-033-20170-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

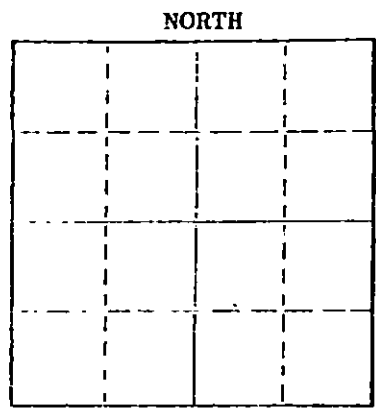

Locate well correctly on above Section Plat

Commanche County, Sec. 2 Twp 31 Rge. (E) 18 (W)

Location as "NE/CNW/SW" or footage from lines 1855' FEL, 1980' FNL

Lease Owner Cities Service Oil Company

Lease Name Herrington "A" Well No. 1

Office Address 209 E. William, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) D & A

Date well completed 2/3 1975

Application for plugging filed 2/3 1975

Application for plugging approved 2/3 1975

Plugging commenced 2/3 1975

Plugging completed 2/3 1975

Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. Kussell Biberstein

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5100 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				13-3/8"	230	-0-
				8-5/8"	1015	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with heavy mud to 1000'

Spotted 25 Sacks Cement at 1000' and Filled with mud to 225'

Spotted 25 Sacks Cement at 225' and Filled with mud to 40'

Spotted 10 Sacks at 40' to Base of Cellar.

Name of Plugging Contractor Gabbert-Jones, Inc. (If additional description is necessary, use BACK of this sheet)

Address 830 Sutton Bldg., 209 E. William, Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF SEDGWICK ss.

W. J. Devaney (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

Glenn E. Meier (Signature)

STATE NOTARY PUBLIC
Sedgwick County, Kansas
209 E. William, Wichita, Kansas 67202 (Address)

Subscribed and Sworn to before me this 19th day of February, 19 75

15-033-20170-0000

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

Herrington "A" #1
C-SW-NE Sec 2-31S-18W
Comanche County Kansas

Commenced: 1-17-75

Completed: 2-3-75

OPERATOR: CITIES SERVICE OIL CO.

From	Depth to	Formation	Remarks
0	50	Clay	Ran 6 jts of 13 3/8" 48#
50	180	Sand	csg set @ 230' Cemented w/
180	610	Shale-Redbed	150 sks Common 6% Gel-3% CC
610	726	Redbed	1/2 Floseal per sack
726	1020	Dry Drill	PD @ 11:15 p.m. 1-18-75
1020	1430	Redbed-Shale	
1430	1500	Redbed-Shale-Lime	Ran 31 jts of 20# 8 5/8" csg
1500	2353	Shale-Lime	set @ 1015' Cemented w/300
2353	2716	Lime-Shale	sks Common 3% CC
2716	2980	Shale-Lime	PD @ 5:05 a.m. 1-20-75
2980	3062	Lime-Shale	Basket @ 78' Cemented w/
3062	3088	Shale-Lime	100 sks Job Completed @ 5:30 a.m.
3088	3309	Lime-Shale	1-20-75
3309	3477	Lime	
3477	4055	Lime-Shale	
4055	4157	Lime	
4157	4357-Shale	Lime-Shale	
4357	5100	Lime	
	5100 - TD		DRY & ABANDONED

I, James S. Sutton II, certify this is a correct copy of the Drillers' Log for the well drilled C-SW-NE Sec 2-31S-18W Comanche County Kansas to the best of my knowledge and belief.

James S. Sutton II
JAMES S. SUTTON II

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 18th day of February, 1975, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.