

15-033-20185-00-01

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Comanche County, Sec. 28 Twp. 32 Rge. 18W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines

C/SW/NW
Lease Owner Roxana Corporation
Lease Name Reynolds Well No. 1 (OWWO)

Office Address Box 1162, Great Bend, KS 67530

Character of Well (Completed as Oil, Gas or Dry Hole)
Oil

Date Well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced January 28 1981
Plugging completed February 5, 1981

Reason for abandonment of well or producing formation
Depleted


If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Maurice Leslie

Producing formation Depth to top Bottom Total Depth of Well 5378'

Show depth and thickness of all water, oil and gas formations.

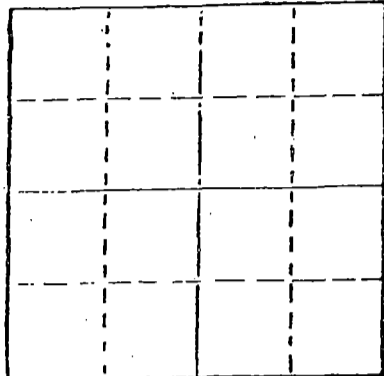

Locate well correctly on above
Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	502'	None
				4-1/2"	5313'	4031.42'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Dump sand 5175' and four (4) sacks cement.

Shot pipe at 4740', 4500', 4300', 4100' and 4000'.

Pulled 96 joints of 4-1/2" casing.

Squeezed well with eight (8) sacks hulls, twenty-five (25) sacks gel,

One hundred (100) sacks 50/50 pozmix cement with 6% added gel.

02-10-1981

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.

STATE OF KANSAS COUNTY OF BARTON, ss.

James W. Rockhold (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

James W. Rockhold
James W. Rockhold, Box 698, Great Bend,
(Address) KS 67530

SUBSCRIBED AND SWORN TO before me this 9th day of February, 1981

Ruth L. Sloan
Ruth L. Sloan Notary Public.

My commission expires September 27, 1981

15-033-20185-00-01

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

Reynolds #1 OWWO
C-SW-NW Sec 28-32S-18W
Comanche County Kansas

Old Information:

Operator: Icar Addis

Commenced: 8-4-75
Completed: 8-22-75
TD 5751

New Information:

Operator: Roxanna Corp

Commenced: 2-15-80
Completed: 2-17-80
TD 5378

Depth		Formation	Remarks
From	to		
0	2610	Mud & Cement	Set 502' of 8 5/8" casg Cemented w/350 sks Cement (was Icar Addis #1 Reynolds)
2610	5378	Heavy Mud	
	5378 - TD		Ran 128 jts of 10 1/2" Cemented w/125 sks 40/60 Posmix 18% Salt / Sat 3/4# CFR-2 500 Gallons Mud Flush P. D. @ 4:30 p.m. 2-17-80

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

I, the undersigned, being duly sworn on oath, state that the above Drillers' Well Log is true and correct to the best of my knowledge and belief and according to the records of this office.

GABBERT-JONES, INC.

James S. Sutton II
JAMES S. SUTTON II

Subscribed and sworn to before me this 4th day of March, 1980.

Elizabeth J. Edwards
ELIZABETH J. EDWARDS-NOTARY PUBLIC

My Commission expires February 6, 1983.

