

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Comanche County, Sec. 7 Twp. 32S Rge. (E) 18 (W)

Location as "NE/CNW%SW%" or footage from lines C NW NE

Lease Owner Beard Oil Company

Lease Name Stark Well No. 1

Office Address 2000 Classen Blvd., Oklahoma City, Okla. 73106

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed Oct. 10, 19 68

Application for plugging filed (letter 10/15/68) Oct. 10, 19 68

Application for plugging approved Oct. 10, 19 68


Plugging commenced Oct. 10, 19 68

Plugging completed Oct. 10, 19 68

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

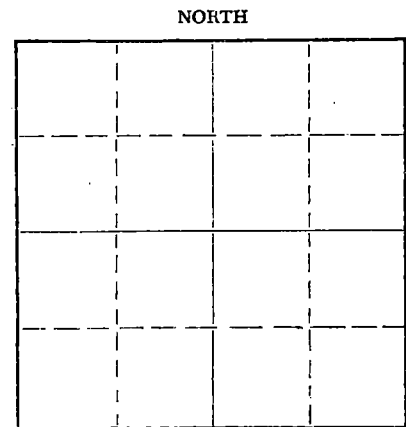

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well S. P. Warren

Producing formation Depth to top Bottom Total Depth of Well 5304 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	454'	8-5/8"	454'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 700 feet. Set first plug @ 700 feet with 40 sacks cement.
Filled hole with heavy mud to 300 feet. Set second plug @ 300 feet with 25 sacks cement.
Filled hole with heavy mud to 40 feet. Set third plug @ 40 feet with 10 sacks cement.
Plugged rat hole with 2 sacks cement. Job complete @ 9:30 AM, October 10, 1968.

RECEIVED
STATE CORPORATION COMMISSION
OCT 16 1968
CONSERVATION DIVISION
Wichita, Kansas
10-16-1968

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones, Inc.

Address 830 Sutton Place - Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss. E. E. Hall


(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. E. Hall

830 Sutton Place, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 15 day of October, 1968

Barbara J. Layton
Barbara J. Layton Notary Public.



15-033-20036 00-00

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

STARK #1
C NW NE Section 7-32S-18W
Comanche County, Kansas

Commenced: September 26, 1968
Completed: October 10, 1968

OPERATOR - Beard Oil Company

DEPTH		FORMATION	REMARKS
From	To		
0	250	Sand and clay	
250	405	Red bed	
405	415	Anhydrite	
415	454	Red bed and shale	Ran 11 joints of 8-5/8" casing, set @ 454' w/350 sacks cement.
454	1020	Red bed and shale	
1020	1249	Shale and shells	
1249	1450	Shale	
1450	2315	Shale and shells	
2315	2640	Shale and lime	
2640	2780	Lime	
2780	2990	Lime and shale	
2990	3051	Lime	
3051	3385	Shale and lime	
3385	3510	Shale and shells	
3510	4135	Shale and lime	
4135	4275	Lime	
4275	4490	Lime and shale	
4490	TD		Dry and abandoned.

I, E. E. HALL, certify this is a correct copy of the Drillers' Log for the well drilled in the C NW NE Section 7-32S-18W, Comanche County, Kansas, to the best of my knowledge and belief.

E. E. Hall
E. E. HALL


STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 15th day of October, 1968, personally appeared E. E. HALL to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

My Commission Expires Feb. 1, 1972

Barbara J. Layton
Barbara J. Layton, Notary Public



RECEIVED
STATE CORPORATION COMMISSION
OCT 16 1968
CONSERVATION DIVISION
Wichita, Kansas

10-16-1968