

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-009-25962-00-00
Spot: NWSWSESE Sec/Twnshp/Rge: 4-19S-11W
558 feet from S Section Line, 1215 feet from E Section Line
Lease Name: TONY KLEPPER Well #: 4-1
County: BARTON Total Vertical Depth: 3475 feet

Operator License No.: 3208

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	368		250 sx

Op Name: K & N PETROLEUM, INC.

Address: 1105 WALNUT
GREAT BEND, KS 67530

Well Type: DH

UIC Docket No:

Date/Time to Plug: 04/14/2014 12:00 AM

Plug Co. License No.: 33350

Plug Co. Name: SOUTHWIND DRILLING, INC.

Proposal Rcvd. from: WES

Company: SOUTHWIND DRILLING, INC.

Phone: (620) 566-7094

Proposed Ordered 195 sx 60/40 pozmix - 4% gel cement with 1/4# flo- seal per sack.

Plugging Space all plugs with heavy drilling mud through drill pipe.

Method:

Plugging Proposal Received By: RICHARD WILLIAMS

WitnessType: NONE

Date/Time Plugging Completed: 04/14/2014 10:00 PM

KCC Agent: RICHARD WILLIAMS

Actual Plugging Report:

1st plug @3402 w/50 sx
2nd plug @612 w/25 sx
3rd plug @418 w/80 sx
4th plug @40 w/10 sx

Rathole 30 sx

Perfs:

Remarks: COPELAND CEMENTING

KCC WICHITA

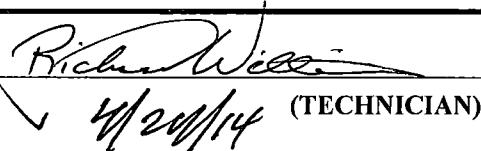
APR 23 2014

RECEIVED

Plugged through: DP

District: 04

Signed


Richard Williams
4/20/14

(TECHNICIAN)

CM

APR 15 2014

Form CP-2/3