

CARD MUST BE TYPED

State of Kansas

CARD MUST BE SIGNED

NOTICE OF INTENTION TO ~~DRILL~~ WASH DOWN

(see rules on reverse side)

Expected Spud Date... November 14, 1988
month day year

API Number 15— 033-01,008-00-01

OPERATOR: License # 5050
Name Hummon Corporation
Address 400 One Main Place
City/State/Zip Wichita, KS 67202
Contact Person Byron E. Hummon, Jr.
Phone (316) 263-8521

— East
NW . NW . NW Sec... 32 Twp... 31. S, Rg... 18... X West
4950 Ft. from South Line of Section
4950 Ft. from East Line of Section

(Note: Locate well on Section Plat on reverse side)

CONTRACTOR: License # 5429
Name Hayes Well Service
City/State Wichita, KS 67202

Nearest lease or unit boundary line 330 feet
County Comanche
Lease Name Boisseau Well # 1 WD

Well Drilled For: Well Class: Type Equipment:
X Oil Storage Infield X Mud Rotary
Gas Inj Pool Ext Air Rotary
WD ~~XXXX~~ Expl X Wildcat Cable

Ground surface elevation feet MSL
Domestic well within 330 feet: yes X no
Municipal well within one mile: yes X no

If OWWO: old well info as follows:
Operator Rupp-Ferguson Oil Co.
Well Name Brinkman #1
Comp Date 11/7/54 Old Total Depth 5261'

Depth to bottom of fresh water 250
Depth to bottom of usable water 380
Surface pipe by Alternate: 1 X 2
Surface pipe placed in hole set 13-3/8" @ 437'
Conductor pipe required set 20" @ 145'
Projected Total Depth 5261 feet
Formation Mississippi

I certify that well will comply with K.S.A. 55-101, et seq., plus eventually plugging hole to KCC specifications.
Date 11/7/88 Signature of Operator or Agent [Signature] Title President


For KCC Use:
Conductor Pipe Required feet; Minimum Surface Pipe Required 437' feet per Alt. 1 X
This Authorization Expires 5-9-89 Approved By [Signature] 11-9-88

EFFECTIVE DATE: 11-14-88

Must be filed with the K.C.C. five (5) days prior to commencing well
 This card void if drilling not started within six (6) months of date received by K.C.C.

Important procedures to follow:

A Regular Section of Land
 1 Mile = 5,280 Ft.

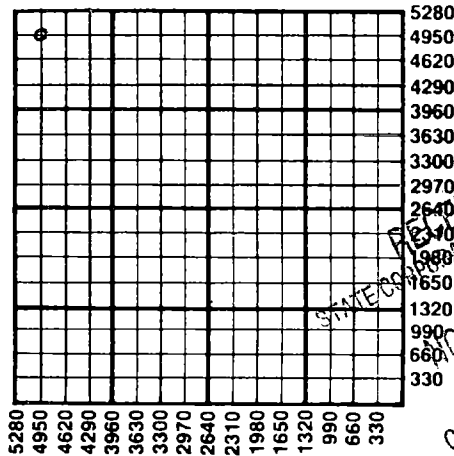

1. Notify District office before setting surface casing.
2. Set surface casing by circulating cement to the top.
3. File completion forms ACO-1 with K.C.C. within 120 days of well spud date, following instructions on ACO-1, side 1, and including copies of wireline logs.
4. Notify District office 48 hours prior to old well workover or re-entry.
5. Prior to filing Intent, prepare a proposed plugging plan in case well is D & A, then obtain approval of plan when calling district office prior to setting surface pipe.
6. Submit plugging report (CP-4) to K.C.C. after plugging is completed.
7. Obtain an approved injection docket number before disposing of salt water.

8. Notify K.C.C. within 10 days when injection commences or terminates.

9. If an alternate 2 completion, cement in the production pipe from below any usable water to surface within 120 days of spud date.

RECEIVED
 NOV 8 1988
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 Wichita, Kansas

NOV 9 1988

CONSERVATION DIVISION
 Wichita, Kansas

State Corporation Commission of Kansas
 Conservation Division
 200 Colorado Derby Building
 Wichita, Kansas 67202-1212
 (316) 263-3238