

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-033-21238-00-00  
Spot: SWSENE Sec/Twnshp/Rge: 13-32S-19W  
2970 feet from S Section Line, 990 feet from E Section Line  
Lease/Unit Name: KASNER Well Number: 1  
County: COMANCHE Total Vertical Depth: 5870 feet

Operator License No.: 5123  
Op Name: PICKRELL DRILLING COMPANY, INC.  
Address: 100 SOUTH MAIN - SUITE 505  
WICHITA, KS 67202

Conductor Pipe Size: 20 feet: 78 #190.78  
Production Casing Size: 5.5 feet: 5869 WITH 185 SX CMT  
Surface Casing Size: 8.625 feet: 786 WITH 325 SX CMT

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 09/09/2003 1:00 PM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: RUSSELL MYERS Company: PICKRELL DRILLING Phone: (316) 262-8427

Proposed Plugging Method: SAND TO 4625' WITH 5 SX CMT. 1ST PLUG PULL CASING TO 1100'. SPOT 10 SX GEL & 50 SX CMT. 2ND PLUG PULL CASING TO 800' & SPOT 50 SX CMT. 3RD PLUG PULL TO 400' & SPOT 40 SX CMT. 4TH PLUG PULL TO 40' & SPOT 10 SX CMT.

Plugging Proposal Received By: STEVE MIDDLETON Witness Type: Plugging Operations 100% Witnessed (Complete)  
Date/Time Plugging Completed: \_\_\_\_\_ KCC Agent: STEVE MIDDLETON

Actual Plugging Report:


PBTD 4822' (BP) PERFS AT 4694-4700'. SAND TO 4625' WITH 5 SX CMT. 1ST PLUG PULL CASING TO 1100'. SPOT 10 SX GEL & 50 SX CMT. 2ND PLUG PULL CASING TO 800' & SPOT 50 SX CMT. 3RD PLUG PULL TO 400' & SPOT 40 SX CMT. 4TH PLUG PULL TO 40' & SPOT 10 SX CMT. STAYED FULL.

RECEIVED  
9-19-03  
SEP 19 2003  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 2500' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

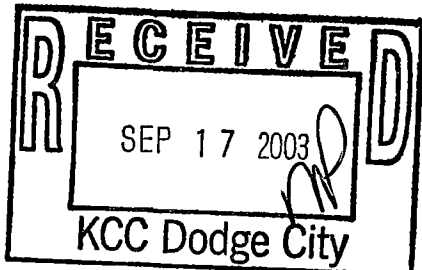

Signed \_\_\_\_\_

(TECHNICIAN)

INVOICED

DATE 9-19-03

INV. NO. 2004060526

