


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

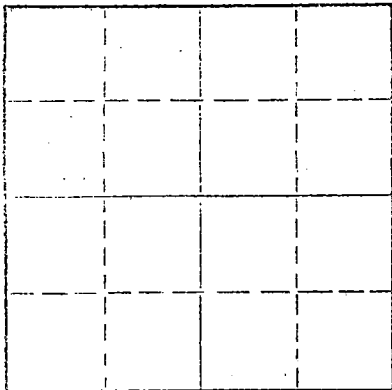

Locate well correctly on above  
Section Plat

Commanche County. Sec. 2 Twp. 32 Rge. 16 (E) W (W)  
Location as "NE/CNW/SW" or footage from lines W/2 W/2  
Lease Owner Midwestern Supply Co., Inc.  
Lease Name Schutte Well No. #1  
Office Address 207 Brown Bldg., Wichita, Ks. 67202  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed September 19 72  
Application for plugging approved September 19 72  
Plugging commenced September 19 19 72  
Plugging completed September 22 19 72  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstein  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well \_\_\_\_\_ Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	312	None
				5 1/2"	4799	3594

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

September 19, 1972 Plugged off bottom. Dumped sand to 4300'. Mixed and dumped 5 sx of cement.

September 22, 1972 Plugged off top. Set 10' rock bridge at 300'. Filled 8 5/8" surface casing from 300' to base of cellar with 3000 lb. P.S.I. ready mix concrete.

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 20 1972  
CONSERVATION DIVISION  
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor RUSS CASING PULLING, INC.  
Address P. O. Box 1082 ; Great Bend, Kansas 67530

STATE OF KANSAS COUNTY OF SEDGWICK, ss.  
Robert M. Brentlinger (XXXXXXXXXXXX) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Robert M. Brentlinger  
207 Brown Building - Wichita, Kansas 67202  
(Address)

Subscribed and Sworn to before me this 18th day of October, 19 72



Karen E. Duarte  
Notary Public.

JUN 28 1969

B.D. & M.P. Schubert

Com 3-15-69,

Copy 4-3-69

GILBERT SCHUETTE #1-2  
C W/2 Sec. 2-32S-16W  
Comanche County, Kansas

Red  
Sigsbee

KB 1889

TD 4801

Chase	2320
Council Grove	2652
Admire	2990
Wabaunsee	3120
Tarkio	3280
Heebner	4010
Douglas Zone	4106
Douglas ss	4120
Lansing-K.C.	4210
Marmaton	4652
Cherokee	4730
Mississippian	4792
5 1/2" casing	4796

RECEIVED  
STATE CORPORATION COMMISSION

SEP 15 1972

CONSERVATION DIVISION  
Wichita, Kansas