

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-033-21199-00-00
Spot: E2SE Sec/Twnshp/Rge: 2-33S-19W
1380 feet from S Section Line, 660 feet from E Section Line
Lease/Unit Name: BRASS Well Number: 2-2
County: COMANCHE Total Vertical Depth: 6050 feet

Operator License No.: 5214
Op Name: LARIO OIL & GAS COMPANY
Address: 301 SOUTH MARKET STREET
WICHITA, KS 67202

Conductor Pipe: Size feet: \$196.63
Surface Casing: Size 8.625 feet: 700 WITH 500 SX CMT
Production: Size 4.5 feet: 6039 WITH 100 SX CMT
Liner: Size feet:

Well Type: GAS UIC Docket No: Date/Time to Plug: 10/15/2002 12:00 PM
Plug Co. License No.: 5893 Plug Co. Name: PRATT WELL SERVICE, INC.
Proposal Rcvd. from: BRAD SANDERS Company: LARIO OIL & GAS Phone: (785) 625-5023

Proposed Plugging Method: CIBP @ 5045' WITH 2 SX CMT. FREE POINT CASING & PULL TO 1100'. PUMP 10 SX GEL & 50 SX CMT. 50 SX AT 730'. 30 SX AT 250'. 10 SX AT 40' TO SURFACE.

Plugging Proposal Received By: KEVIN STRUBE WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 10/15/2002 4:30 PM KCC Agent: STEVE MIDDLETON

Actual Plugging Report:

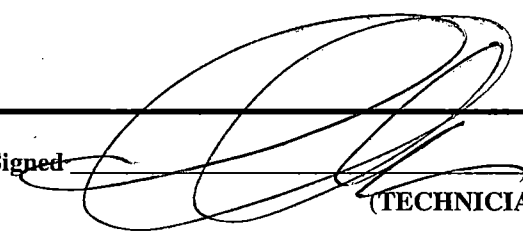
PBTD 5870'. PERFS AT 5090-98, 5102-05, 5206-16, 5224-34, 5256-60'. CIBP @ 5580'. PERFS AT 5906-13 & 5922-31'. DV TOOL @ 5365' WITH 150 SX CMT. CIBP @ 5045' WITH 2 SX CMT ON TOP. 1ST PLUG AT 1100' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 730' WITH 50 SX CMT. 3RD PLUG AT 240' WITH 30 SX CMT. 4TH PLUG AT 40' WITH 10 SX CMT. STAYED FULL.

RECEIVED
10-21-02
OCT 21 2002
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 3200' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

Signed  (TECHNICIAN)

INVOICED OCT 16 2002

DATE 10-22-02

INV. NO. 2003060691

