

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-033-21016-00-01

Spot: E2W2SE

Sec/Twnshp/Rge: 12-32S-17W

1420 feet from S Section Line, 1720 feet from E Section Line

Lease/Unit Name: YORK

Well Number: 1-12

County: COMANCHE

Total Vertical Depth: 5200 feet

Operator License No.: 30288

Op Name: SPESS OIL COMPANY

Address: 200 S. BROADWAY
CLEVELAND, OK 74020

Conductor Pipe Size: 13.375 feet: 102 WITH 190 SX CMT

Production Casing Size: 5.5 feet: 5185 WITH 175 SX CMT

Surface Casing Size: 8.625 feet: 685 WITH 300 SX CMT

Well Type: GAS

UIC Docket No:

Date/Time to Plug: 07/09/2003 10:45 AM

Plug Co. License No.: 99998

Plug Co. Name: COMPANY TOOLS

Proposal Rcvd. from: KEVIN STONECIPHER

Company:

Phone: (918) 460-8220

Proposed Plugging Method: PUMP 300# HULLS & 30 SX CMT. RUN TUBING TO 1000'. 50 SX CMT AT 1000'. 50 SX CMT AT 680'. 30 SX CMT AT 260'. 10 SX CMT AT 30'.

Plugging Proposal Received By: STEVE PFEIFER

WitnessType: Plugging Operations 100% Witnessed (Complete)

Date/Time Plugging Completed: 07/09/2003 11:45 AM

KCC Agent: STEVE MIDDLETON

Actual Plugging Report:

PERFS AT 5086-94'. PUMP 300# HULLS & 30 SX CMT. PULL CASING OUT OF HOLE. RUN TUBING TO 1000'. 1ST PLUG LOAD HOLE WITH MUD. SPOT 50 SX CMT AT 1000'. 2ND PLUG PULL TUBING TO 680' & SPOT 50 SX CMT. 3RD PLUG PULL TUBING TO 260' & SPOT 30 SX CMT. 4TH PLUG PULL TUBING TO 30' & SPOT 10 SX CMT. HOLE STAYED FULL.

RECEIVED
8-12-03
AUG 12 2003
KCC WICHITA


Remarks: USED 60/40 POZMIX 6% GEL BY OKLAHOMA PLUGGING SERVICES. Rec'd 2018' of 5'1/2"

Plugged through: TBG

District: 01

Signed

[Signature]
(TECHNICIAN)

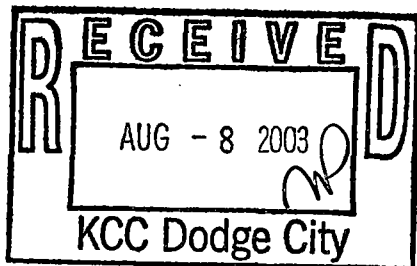

INVOICED

DATE 8-13-03

INV. NO. 2004060389

[Signature]
Form CR-23