


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Location as "NE/CNWxSWx" or footage from lines Comanche County, Sec. 23 Twp. 33 Rge. (E) 20 (W) 150' SE of C NE SE  
Lease Owner Yucca Petroleum Inc.  
Lease Name Ora Baker Well No. 2  
Office Address P.O. Box 2585 Amarillo, Texas  
Character of Well (completed as Oil, Gas or Dry Hole) dry hole  
Date well completed December 4 1970  
Application for plugging filed December 4 1970  
Application for plugging approved December 4 1970  
Plugging commenced December 4 1970  
Plugging completed December 4 1970  
Reason for abandonment of well or producing formation dry hole

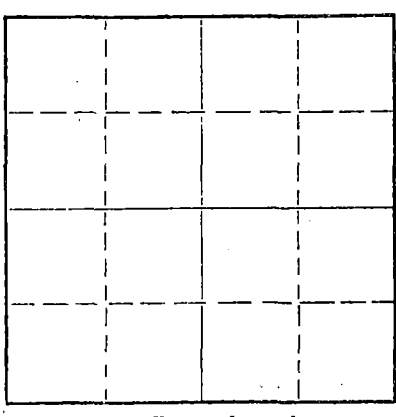

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well R.G. Biberstein  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4820 Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				13 3/8"	361'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.


Set plug spot 20sxs. thru drill pipe @ 4795'  
spot 75 sxs. thru drill pipe @ 410", spot 15 sxs.  
@ 35' Bridged w/Hulls & plug 5 sxs. in Rat hole

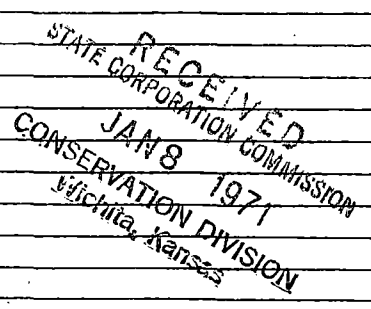

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Leben Drilling, Inc.  
Address P.O. Box 486 Gt. Bend, Ks.

STATE OF Kansas, COUNTY OF Barton, ss.  
James R. Rodgers (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James R. Rodgers  
P.O. Box 486 Great Bend, Kansas  
(Address)



SUBSCRIBED AND SWORN to before me this 7th day of January, 1971


My commission expires November 13, 1973

Helen L. Lindemann  
Notary Public.

# WELL LOG

Company Yucca Petroluem Company  
 Contractor Leben Drilling, Inc.  
 Farm Ora Baker #2  
 Total Depth 4820' RTD  
 Commenced 11-21-70  
 Completed 12-4-70

Sec. 23 T. 33 R. 20  
 Loc. 150' SE of C NE SE  
 County Comanche  
 Casing \*  
 Production  
 D & A



Figures Indicate Bottom of Formations


275	Red Rock
401	Red Bed
2037	Red Bed & Shale
2118	Shale
2207	Anhydrite & Dolomite
3930	Lime & Shale
4150	Shale
4513	Lime & Shale
4584	Lime
4805	Lime & Shale
4820	Lime
<u>4820</u>	<u>RTD</u>

\*  
 13 3/8" 48# New Csg. set @ 361' w/Bottom W/75 sxs. H. L. 5# Gilsonite per sk.  
 1/4# Flo Seal 2% C.C. 75 Common 2% C.C. Cement top thru 1" w/75 sxs. Common 5#  
 Gilsonite 1/4# Flo Seal 2% C.C. Followed w/75 sxs. H. L. 5# Gilsonite 1/4# Flo-Seal  
 Pumped 100 sxs. Common 2% C.C. did not circulate cement.  
 Cement top W/100 sxs. Common 2% C.C. adding chat around Surface casing  
 Mixed 15 sxs. followed w/20 sxs Common 2% C.C. Cemented w/80 sxs. Common 2% C.C.  
 Cement did circulate. Pumped above cement thru 1" pipe went down 5' at end  
 of 1 hr. fill w/cement to base of cellar.

RECEIVED  
 STATE CORPORATION COMMISSION  
 JAN 8 1971  
 CONSERVATION DIVISION  
 Wichita, Kansas

State of Kansas  
 \_\_\_\_\_  
 County of Barton  
 \_\_\_\_\_  
 SS

I, James R. Rodgers of Leben Drilling, Inc., upon oath state that  
 the above and foregoing is a true and correct copy of the log of the Ora Baker #2



James R. Rodgers

Witnessed and sworn to before me this 7th day of January, 1970

My Commission Expires:  
 November 13, 1973

Helen L. Lindenmuth