

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Comanche County, Sec. 11 Twp. 33S Rge. 16 (E) W(W)

Location as "NE/CNW/SW" or footage from lines NW SE

Lease Owner Barnett Oil Company

Lease Name Merrill Ranch Well No. 1

Office Address 411 First Ntl. Bank Bldg., Wichita, Ks.

Character of Well (completed as Oil, Gas or Dry Hole) D & A

Date well completed 11/7 19 71

Application for plugging filed 11/7 19 71

Application for plugging approved 11/7 19 71


Plugging commenced 11/7 19 71

Plugging completed 11/7 19 71

Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

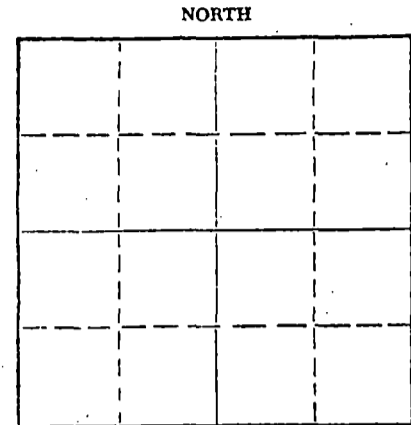

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5000 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	477'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

W/pump truck spot 50 sx cement @ 500'
1/2 sx Hulls Plug @40' cement to base of
cellar., 2 sx in rathole , orders from
Beiberstein

RECEIVED
STATE CORPORATION COMMISSION
NOV 16 1971
CONSERVATION DIVISION
Wichita, Kansas
11-16-71

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Co.

Address 1720 Wichita Plaza, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.


Jim Farrice (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jim Farrice

1720 Wichita Plaza, Wichita, Ks.
(Address)

SUBSCRIBED AND SWORN to before me this 9th day of November, 19 71



Virginia K. Albert
Notary Public.

DRILLERS LOG

No. 1 Merrill Ranch

CASING RECORD

COMPANY: Barnett Oil Company

DESCRIPTION:

8 5/8" @ 477'
w/375 sz cement

CONTRACTOR: Red Tiger Drilling Company

NW SE
11-33S-16W
Comanche County,
Kansas

COMMENCED: October 24, 1971

COMPLETED: November 7, 1971

TOTAL DEPTH: 5000'

ELEVATION:

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Red Bed & Gyp	0	145	
Red Bed	145	768	
Blane	768	784	
Red Bed & Shale & Shells	784	1195	
Red Bed & Shale	1195	1237	
Shale & Shells	1237	1410	
Shale & Lime Stringers	1410	1735	
Shale & Lime	1735	1749	
Anhydrite & Shale	1749	1852	
Shale & Lime Streaks	1852	2040	
Lime & Shale	2040	2225	
Lime	2225	2525	
Shale & Lime	2525	3733	
Lime	3733	3888	
Lime & Shale	3888	3980	
Lime	3980	4702	
Shale & Lime	4702	4742	
Marmonton	4742	4800	
Lime & Shale	4800	4850	
Lime	4850	4870	
Miss	4870	4875	
Shaly Lime	4875	4895	
Miss	4895	4905	
Lime & Shale	4905	5000	

RECEIVED
STATE CORPORATION COMMISSION
NOV 16 1971
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Jim Farrice
Jim Farrice

Subscribed and sworn to before me this 9th day of November, 1971.

NOTARY PUBLIC
STATE OF KANSAS
WICK CO

Virginia K. Albert
Notary Public

My Commission Expires:
July 23, 1974