

JAN 22 1976


15-083-20233-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission
245 North Water
Wichita, KS 67202

FORM CP-4

WELL PLUGGING RECORD

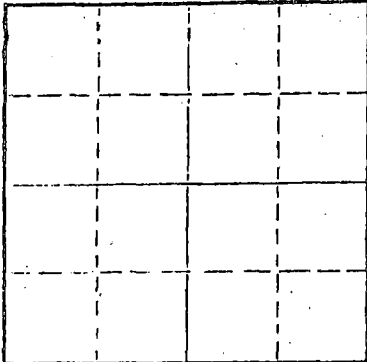

Locate well correctly on above
Section Plat

Hodgman County, Sec. ³⁵~~18~~ Twp. 21 Rge. 24 (E) (W)
Location as "NE/CNW/WSW" or footage from lines C SW SW
Lease Owner Donald C. Slawson
Lease Name Geobel D#1 Well No.
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 12/19/75 19
Plugging completed 1/16/76 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Thomas
Producing formation Depth to top Bottom Total Depth of Well 4150 Feet
Show depth and thickness of all water, oil and gas formations.

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	593	none
				5 4 1/2"	4749'	2799'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Halliburton pumped plug and 35 sacks cement to 4400'. Shot pipe at 3813', 3506', 3215', 3032', 2912', 2820', pulled 85 joints. Halliburton tried to plug well, had hole or split in surface pipe. Had to run 520' of 4 1/2" casing. Halliburton pumped 50 sacks cement, pulled 15 joints, pumped 20 sacks cement, pulled 1 joint.
PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of January, 1976

My commission expires
NOTARY PUBLIC
MARGARET MELCHER
Rice County, Ks.
My Comm. Exp. Feb. 15, 1979

Margaret Melcher
Notary Public.

WELL LOG

Company: Donald C. Slawson
 Suite 408 One Twenty Building
 Wichita, Kansas 67202

Lease: Goebel 'D' #1 35
 C SW SW, Section 13-21-24W
 Hodgeman County, Kansas

Total Depth: 4150' Elevation: 2416 K.B.

Contractor: Slawson Drilling Company, Inc.

Commenced: August 2, 1972

Completed: August 11, 1972

Casing: 594' of 8 5/8" with 325 sx cement
 4749' of 4 1/2" with 125 sx cement

0-340	Surface Hole
340-1685	Shale & Shells
1685-1720	Anhydrite
1720-2423	Shale & Shells
2423-4144	Lime & Shale
4144-4750	Lime
4750	Total Depth

RECEIVED
 STATE CORPORATION COMMISSION


NOV 24 1975
 11-24-75
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) SS:
 COUNTY OF SEDGWICK)

I, James C. Remsberg, of the Slawson Drilling Company, Inc., upon oath state that the above and foregoing is a true and correct copy of the log of the Goebel 'D' #1 well.

James C. Remsberg
 JAMES C. REMSBERG

Subscribed and sworn to before me this 7th day of August, 1972.



Linda R. Mitchell
 Linda R. Mitchell, Notary Public