


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Comanche County. Sec. 22 Twp. 33S Rge. 20W E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
SE SE
Lease Owner KRM Petroleum Corporation
Lease Name Gohn Well No. 1-22
Office Address Guaranty Bk. Bldg., 817 Seventeenth St., Denver
Character of Well (Completed as Oil, Gas or Dry Hole) CO 80202

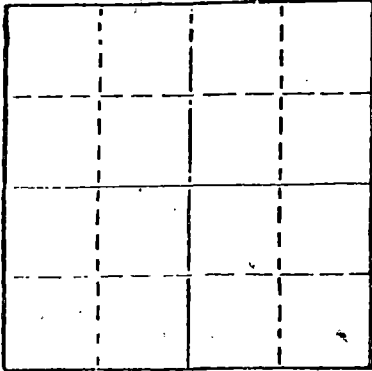

Locate well correctly on above
Section Plat

Date Well completed January 21 1981
Application for plugging filed 1-21 1981
Application for plugging approved 1-21 1981
Plugging commenced 1-21 1981
Plugging completed 1-21 1981
Reason for abandonment of well or producing formation
Dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Maurice Leasley
Producing formation Depth to top Bottom Total Depth of Well
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	820	8 5/8"	19 jnts.	


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

T.D. 5,300' - Plug at 806' with 50 sack common cement at 496', Bridge 40 ft., 10 sacks common cement, 15 sacks common cement in rat hole, 10 sacks common cement in mouse hole, plugged at 5:30 PM- January 21, 1981.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton

STATE OF Kansas COUNTY OF Sedgwick, ss.
Kirby C. Evers, Vice President (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.



(Signature) Kirby C. Evers
P. O. Box 18611, Wichita, Kansas 67207
(Address)

SUBSCRIBED AND SWORN TO before me this 21st day of January, 19 81.

Mary Kay Oeding
Notary Public.

My commission expires MY APPOINTMENT EXPIRES NOV. 28, 1984

STATE CORPORATION COMMISSION

JAN 23 1981

CONSERVATION DIVISION
Wichita, Kansas

OPERATOR: KRM Petroleum Corporation
CONTRACTOR: Xplor Drilling Company, Inc.

COMMENCED: January 1, 1981
COMPLETED: January 21, 1981
CASING RECORD: 8 5/8" at 820'

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>
RED BED	0	1434
ANTHY & DOLO	1434	2127
DOLO & SHALE	2127	2220
LIME & SHALE	2220	2475
LIME & SHALE & DOLO	2475	2688
LIME & SHALE	2688	5186
MISSISSIPPI	5186	5286
LIME & SHALE	5286	5300

STATE OF KANSAS)
) SS:
COUNTY OF SEDGWICK)

I certify that this is a true and correct copy of the Driller's Log on the well drilled SE SE, SEC. 22-33S-20W, Comanche County, Kansas to the best of my knowledge and belief.



XPLOR DRILLING COMPANY

Kirby C. Evers
Kirby C. Evers, Vice President

Subscribed and sworn to before me this 22th day of January 1981.

MY APPOINTMENT EXPIRES NOV. 23, 1984

Mary Kay Cudney
STATE COMMISSIONER

My appointment expires:

JAN 23 1981

CONSERVATION DIVISION
Wichita, Kansas