

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-065-24035-00-00
Spot: SESWSENW Sec/Twnshp/Rge: 13-7S-22W
2630 feet from N Section Line, 1725 feet from W Section Line
Lease Name: DAVID WORCESTER UNIT Well #: 1-13
County: GRAHAM Total Vertical Depth: 3795 feet

Operator License No.: 32819
Op Name: BAIRD OIL COMPANY LLC
Address: 113 W MAIN PO BOX 428
LOGAN, KS 67646

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	219		160 sx

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 05/17/2014 12:00 AM
Plug Co. License No.: 33575 Plug Co. Name: WW DRILLING, LLC
Proposal Rcvd. from: CALVIN PFANNESTEIL Company: WW DRILLING, LLC Phone: (785) 743-6774

Proposed Plugging Method: Ordered 255 sx 60/40 pozmix - 4% gel cement with 1/4# flo- seal per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: PAT STAAB Witness Type: NONE
Date/Time Plugging Completed: 05/17/2014 5:30 AM KCC Agent: PAT STAAB

Actual Plugging Report:

1st plug @3672 w/50 sx
2nd plug @1807 w/25 sx
3rd plug @1007 w/100 sx
4th plug @269 w/40 sx
5th plug @40 w/10 sx

Rathole 30 sx

Perfs:

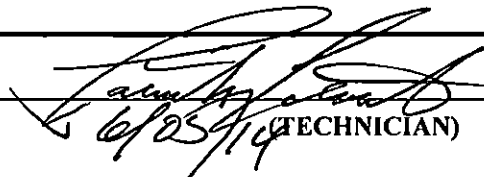
Remarks: GLOBAL CEMENTING

Plugged through: DP

KCC WICHITA
MAY 28 2014
RECEIVED

District: 04

Signed _____


(TECHNICIAN)

CM

MAY 20 2014

Form CP-2/3