

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-063-22087-00-00  
Spot: NENWSESE Sec/Twnshp/Rge: 33-13S-29W  
1223 feet from S Section Line, 846 feet from E Section Line  
Lease Name: OTTLEY Well #: 3  
County: GOVE Total Vertical Depth: 4500 feet

Operator License No.: 9090  
Op Name: CHARTER ENERGY, INC.  
Address: PO BOX 252  
GREAT BEND, KS 67530

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4492		200 SX
SURF	8.625	233		160 SX

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 05/09/2014 10:00 AM  
Plug Co. License No.: 99977 Plug Co. Name: QUALITY OIL WELL CEMENTING  
Proposal Rcvd. from: STEVE BAIZE / CHRIS SCH Company: QUALITY OIL WELL CEMENTING Phone: (620) 793-9090

Proposed Plugging Method: Ordered 290 sx 60/40 pozmix 4% gel cement w/ 350 # hulls and 12 sx gel.  
Port Collar at 2175' w/145 sx cement. Perforations: 3863' - 3867', 4040' - 4043' and 4416' - 4425'.

Plugging Proposal Received By: MARVIN MILLS Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 05/09/2014 11:30 AM KCC Agent: MARVIN MILLS

Actual Plugging Report:

Tied on to casing and pumped 100 sx cement w/250 # hulls followed by 12 sx gel followed by 190 sx cement w/100 # hulls. Shut in pressure 500 psi. Back side is full of cement.

GPS: 38.87650 -100.54153

Perfs:

Top	Bot	Thru	Comments
4416	4425		
4040	4043		
3863	3867		

KCC WICHITA

MAY 20 2014

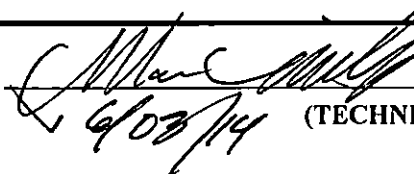
RECEIVED

Remarks: QUALITY CEMENTING TICKET # 224

Plugged through: CSG

District: 04

Signed

  
6/03/14 (TECHNICIAN)

CM

MAY 13 2014