


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit

COUNTY Comanche SEC. 17 TWP. 33S RGE. 19W E/W  
Location as in quarters or footage from lines:  
C E/2 NW/4

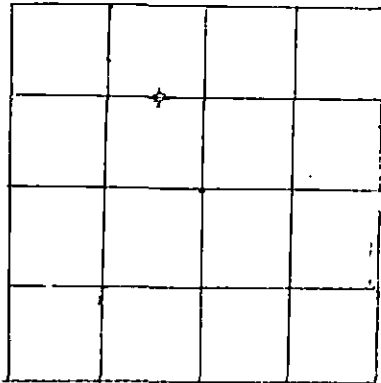

Locate Well  
correctly on above  
Section Platt.

Lease Owner Bow Valley Exploration  
Lease Name Selzer Well No. 2-17  
Office Address 1700 Broadway, Suite 900, Denver, Colorado 80290  
Character of Well (Completed as Oil, Gas or Dry Hole): Dry Hole  
Date Well Completed September 29, 1981  
Application for plugging filed September 29, 1981  
Plugging commenced September 29, 1981  
Plugging completed September 29, 1981  
Reason for abandonment of well or producing formation \_\_\_\_\_

Was permission obtained from the Conservation Division or it's  
Agent's before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Paul Luthi, Minneola, KS  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ bottom \_\_\_\_\_ T.D. 5359

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
Surface	shale	0	628	8-5/8"	596'	none
	cemented w/300 sx lite, 6% gel, 3% cc, 1/2 floccle per sk. followed w/150sx common, 3% cc, no returns, plug down @ 7:30 a.m. 9-17-81 By Halliburton					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged as follows:

Filled hole w/mud spotted 35 sx 50/50 pozmix, .4% gel, thru open end drill pipe @ 1000'; mud to 570'; rubber plug & 40 sx cement thru drill pipe, mud to 40'; 1/2 sx hulls & plug for solid bridge, pumped 10 ppc to surface, 5 sx in rat hole, 5 sx in mousehole. Completed @ 6:45 p.m. 9-29-81 by Halliburton


RECEIVED  
OCT 5 1981  
10-5-81  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Husky Drilling Co., Inc.

STATE OF KANSAS COUNTY OF SEDGWICK, ss.  
John S. Crowe (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
200 E. First, Suite 500, Wichita, KS 67202  
(Address)

Subscribed and sworn to before me this 30th day of September, 1981

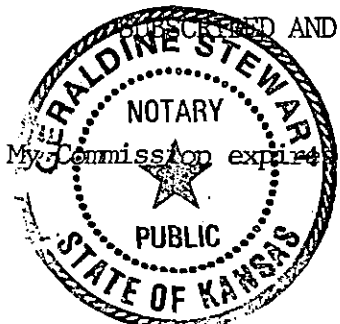

Geraldine Stewart  
Geraldine Stewart Notary Public.

