

State

15-033-00071-0000


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

OR  
~~WELL PLUGGING RECORD~~ Strike out upper line when reporting plugging of formations.

NORTH

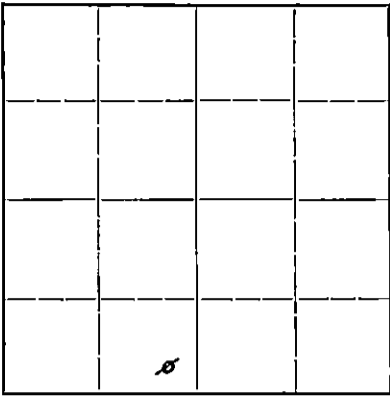

Locate well correctly on above Section Plat

Comanche County, Sec. 27 Twp. 33S Rge. ~~35~~ 19 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from line SE of SW 1/4, 330' fm Sth & East lines

Lease Owner Sinclair Prairie Oil Co

Lease Name Exchange Bank

Well No. 1

Office Address Box 521, Tulsa, Okla.

Character of Well (completed as Oil, Gas or Dry Hole) dry hole

Date well completed May 29 1942

Application for plugging filed June 4 1942

Application for plugging approved June 5 1942

Plugging commenced June 5 1942

Plugging completed June 5 1942

Reason for abandonment of well or producing formation completed for a dry hole.

If a producing well is abandoned, date of last production          19        

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well C.T. Alexander

Producing formation          Depth to top          Bottom          Total Depth of Well 6525 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| Formation | Content | From | To | Size | Put In | Pulled Out |
|-----------|---------|------|----|------|--------|------------|
|           |         |      |    | 20"  | 20'    | 0          |
|           |         |      |    | 13"  | 439'   | 0          |
|           |         |      |    |      |        |            |
|           |         |      |    |      |        |            |
|           |         |      |    |      |        |            |
|           |         |      |    |      |        |            |
|           |         |      |    |      |        |            |
|           |         |      |    |      |        |            |
|           |         |      |    |      |        |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from          feet to          feet for each plug set.

6525-465' circulated heavy mud.  
465' set wood plug.  
435' Cement 20 sx.  
28' circulated heavy mud.  
        Cement 10 sx.

**PLUGGING**  
FILE E 27 33-19-42  
BOOK G 37 1E-16

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Victor Chancellor.

Address Box 774, Great Bend, Kas.


STATE OF Kansas, COUNTY OF Barton, ss.

         (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Victor Chancellor*

SUBSCRIBED AND SWORN to before me this 8th day of June

My commission expires 6-14-43

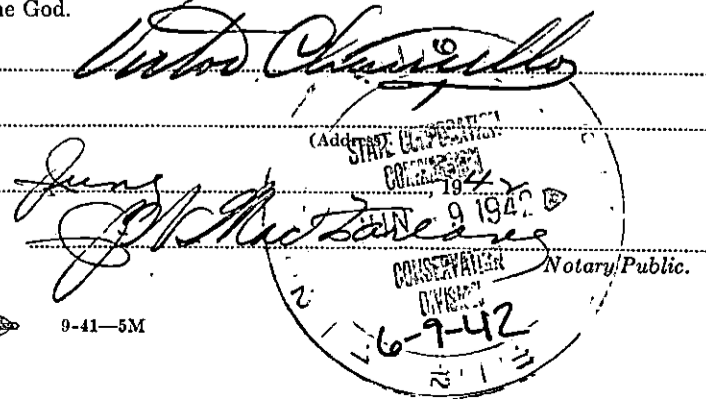

15-033-00071-0000

Well Log

Sinclair Prairie Oil Co

# 1 Exchange Bank  
 Location 1/7/42 By Co. Engr.  
 330' fm Sth & East lines (SE of SW)  
 SW/4, 27-33S-19W, Comanche Co. Kas.  
 Elev. 1935'

Harbar Drlg Co. - Rotary tools  
 Began drlg 2/15/42  
 Completed drlg 5/29/42  
 T.D. 6526'  
 Dry Hole

DRILLERS LOG

|   |                    |
|---|--------------------|
| Surface Clay                                      | 40'                |
| Sand  | 70'                |
| Red Bed   | 245                |
| Sand  | 288 (19" hole)     |
| Ran 1 jt 20 1/2' of 20" OD condr pipe (90# 8thd)  |                    |
| Set at 32 1/2' fm bottom of cellar w/ 265 sx cmt. |                    |
| Red Bed   | 420                |
| Lime  | 465 (17 3/4" hole) |
| Ran 439' of 13" OD 60# 8thd SS & LW               |                    |
| Set at 451' w/ 500 sx cmt.                        |                    |
| Red Bed & Shells                                  | 1265 (9" hole)     |
| Lime  | 1290               |
| Salt & Shale                                      | 1485               |
| Shale & Shells                                    | 1600               |
| Lime  | 1610               |
| Shale & Lime Shells                               | 2000               |
| Lime & Shale                                      | 2290               |
| Lime  | 2580               |
| Lime & Shale                                      | 2720               |
| Lime  | 2795               |
| Lime & Chert                                      | 2815               |
| Lime  | 3035               |
| Lime & Shale                                      | 3080               |
| Lime  | 3105               |
| Lime & Shale                                      | 3250               |
| Shale   | 3275               |
| Lime  | 3300               |
| Lime & Shale                                      | 3420               |
| Lime Shells Shale                                 | 3475               |
| Lime & Shale                                      | 3560               |
| Lime & Shale                                      | 3645               |
| Lime  | 3700               |
| Lime & Shale                                      | 3775               |
| Lime  | 3895               |
| Lime & Shale                                      | 4160               |
| Shale & Shells                                    | 4275               |
| Lime  | 4040               |
| Lime & Shale                                      | 4340               |
| Lime  | 4370               |
| Lime & Shale                                      | 4415               |
| Lime  | 4445               |
| Lime & Shale                                      | 4500               |
| Shale & Lime                                      | 4550               |
| Lime  | 4860               |
| Lime & Chert                                      | 4875               |
| Lime-soft   | 4896               |
| Lime  | 4950               |
| Lime & Shale                                      | 4985               |
| Lime (cored 5120-25)                              | 5121               |
| Lime & Shale                                      | 5165               |
| Lime  | 5375               |
| Cored 5375-5465'                                  |                    |
| Lime  | 5680               |
| Lime-Chert  | 5684               |
| Lime  | 5690               |
| Lime & Chert                                      | 5759               |
| Chert   | 5761               |
| Lime & Chert                                      | 5768               |
| Lime  | 5775               |
| Lime & Chert                                      | 5786               |
| Chert   | 5790               |
| Lime & Chert                                      | 5817               |
| Lime  | 5860               |
| Lime & Chert                                      | 5870               |

**PLUGGING**  
 FILE NO. 27 23R-19W  
 BOOK PAGE 37 LINE 16

6-9-42

15-033-0007-10000

Well Log  
Sinclair Prairie Oil Co

# 1 Exchange Bank - Cont'd

|                                  |         |
|----------------------------------|---------|
| Lime                             | 5941'   |
| Cored 5941-6013'                 |         |
| Lime                             | 6041    |
| Cored 5941-6095'                 |         |
| Lime                             | 6106    |
| Cored 6106-6112'                 |         |
| Lime & Chert                     | 6123    |
| Chert                            | 6128    |
| Lime & Chert                     | 6138    |
| Chert                            | 6144    |
| Lime & Chert                     | 6152    |
| Chert                            | 6157    |
| Lime & Chert                     | 6194    |
| Lime                             | 6206    |
| Chert                            | 6208    |
| Lime & Chert                     | 6213    |
| Chert                            | 6217    |
| Lime                             | 6219    |
| Cored 6219-6231                  |         |
| Chert                            | 6239    |
| Lime & Chert                     | 6243    |
| Chert                            | 6251    |
| Lime & Chert                     | 6257    |
| Chert                            | 6262    |
| Lime & Chert                     | 6274    |
| Cored 6274-6290                  |         |
| Lost circulation & cemented off. |         |
| Lime                             | 6329    |
| Lime & Chert                     | 6338    |
| Cored 6338-6392                  |         |
| No records 6392-6426             |         |
| Cored 6426-6478                  |         |
| Chert                            | 6480    |
| Lime                             | 6491    |
| Cored 6491-6509                  |         |
| Lime                             | 6525 TD |
| Ran Schlumberger test            |         |
| Dry hole                         |         |
| Plugged & Abandoned 6/5/42       |         |