

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-051-20267-00-00
Spot: SESWESW Sec/Twnshp/Rge: 18-12S-17W
265 feet from S Section Line, 3556 feet from E Section Line
Lease Name: 1 SCHMEIDLER Well #: 3
County: ELLIS Total Vertical Depth: 3659 feet

Operator License No.: 7383
Op Name: GRADY BOLDING CORPORATION
Address: 114 NORTH MAIN P.O. BOX 486
ELLINWOOD, KS 67526

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	3646		75 SX
SURF	8.625	223		140 sx

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 03/27/2014 12:30 PM
Plug Co. License No.: 32810 Plug Co. Name: PROFESSIONAL PULLING SERVICES LLC
Proposal Rcvd. from: DAVE HEIN Company: GRADY BOLDING CORP Phone: (785) 623-2084

Proposed Plugging Method: Ordered 304 sx 60/40 pozmix 4% gel cement, 13 sx gel and 500 # hulls.
LKC: 3457' - 3461', 3468' - 3472', 3452' - 3456', 3462' - 3466'
ARB: 3646' - 3654'
Squeezed at 783' - 846' w/200 sx cement.

Plugging Proposal Received By: PAT STAAB WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 03/27/2014 4:45 PM KCC Agent: PAT STAAB

Actual Plugging Report:

Perf Tech perforated at 1850' and 1375'.
Professional Pulling ran in hole with tubing to 2900'. Quality rigged to tubing and pumped 13 sx gel followed by 50 sx cement w/200 # hulls mixed in. Pulled tubing to 1850'. Rigged to tubing and pumped 250 sx cement w/300 # hulls to circulate cement to surface. Pulled tubing. Topped off 5 1/2" casing with 5 sx cement. Hole standing full. Ran out of cement. Will top off 8 5/8" when well head is cut off.
Topped 8 5/8" and 5 1/2" casing with 35 sx cement.

GPS: 39.00238 -099.25423
319' FSL 3451' FEL
SE SW SE SW

Perfs:

Remarks: QUALITY OILWELL CEMENTING TICKET # 7188

Plugged through: TBG

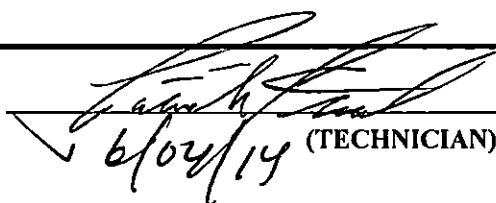
KCC WICHITA

MAY 09 2014

RECEIVED

District: 04

Signed


(TECHNICIAN)

CM