

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-055-00309-00-00
Spot: SE Sec/Twnshp/Rge: 7-22S-34W
1265 feet from S Section Line, 1295 feet from E Section Line
Lease Name: WHEAT Well #: 1-7
County: FINNEY Total Vertical Depth: 2614 feet

Operator License No.: 32334
Op Name: CHESAPEAKE OPERATING, INC.
Address: 6200 N WESTERN AVE PO BOX 18496
OKLAHOMA CITY, OK 73118

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	2593	0	WITH 550 SX CMT
SURF	8.625	305		WITH 200 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 05/07/2014 9:00 AM
Plug Co. License No.: 33961 Plug Co. Name: CONSOLIDATED OIL WELL SERVICES LLC
Proposal Rcvd. from: DENNIS FRICK Company: CHESAPEAKE OPERATING Phone: (620) 277-0803

Proposed Plugging Method: PUMP 200 SX CMT WITH 300# HULLS. DISPLACE TO 500'. PERFORATE 4 HOLES AT 330'. CIRCULATE CMT TO SURFACE DOWN CASING WITH 85 SX CMT.

Plugging Proposal Received By: KEN JEHLIK Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 05/07/2014 11:30 AM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMP 200 SX CMT WITH 250# HULLS DOWN 5 1/2" CASING. DISPLACE WITH WATER TO 500'. PRESSURE TO 700#. HOLDING. RAN CBL FROM 1000' TO 150'. TOC @ 520'. PERFORATE 4 HOLES AT 450'. CIRCULATE CMT TO SURFACE FROM 450' WITH 80 SX CMT, LEAVING THE CASING AND ANNULUS FULL OF CMT.

Perfs:

Top	Bot	Thru	Comments
2544	2568		

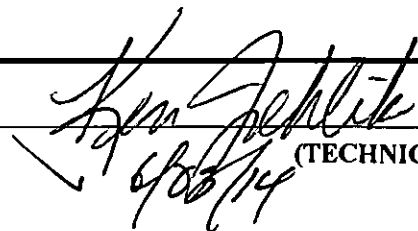
KCC WICHITA
MAY 20 2014
RECEIVED

Remarks: **COMPLIANCE ISSUE: DENIED TA LACK OF LEASE** USED 60/40 POZMIX 4% GEL BY CONSOLIDATED.

Plugged through: CSG

District: 01

Signed


(TECHNICIAN)

RECEIVED
MAY 13 2014
KCC DODGE CITY