


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Comanche County, Sec. 20 Twp. 34S Rge. 19W E/W
Location as "NE/CNW $\frac{1}{2}$ /SW $\frac{1}{2}$ " or footage from lines
NE NW SE

Lease Owner Bow Valley Pet. Inc.
Lease Name Hibbert Well No. 4-20
Office Address 1700 Broadway Suite 900 Denver, Co. 80290
Character of Well (Completed as Oil, Gas or Dry Hole)

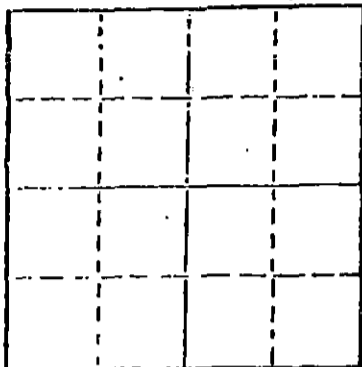

Locate well correctly on above
Section Flat

Oil
Date Well completed 19
Application for plugging filed April 22 1983
Application for plugging approved 19
Plugging commenced June 27 1983
Plugging completed June 30 1983
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bob Tarbutton
Producing formation Depth to top 4890 Bottom 4896 Total Depth of Well 5340
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	609	-0-
				4 1/2	4966	4010

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set. 6-28-83 Pump 30sx cement plug from 4800' to 5160'.
6-30-83 Pump 50sx cement plug from 1500' to 1600' Pump 50sx cement plug from 559 to 659 and
pumped 15sx cement plug from 6 to 40 ft.. Cut well head off six feet below ground level welded
steel plate with name and date.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Jerry Dunkin Casing Pulling Inc.

STATE OF OKLAHOMA COUNTY OF GARFIELD, ss.
(Bow Valley Petroleum Inc.) (employee of ~~XXXXXX~~ operator)

I, the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
filed and that the same are true and correct. So help me God.

(Signature) [Signature] -Field Foreman
329 N. Van Buren, Enid, Oklahoma
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of July, 1983

[Signature]
Notary Public.

commission expires 1-27-85

RECEIVED
STATE CORPORATION COMMISSION

JUL 17 1983
7-13-83
CONSERVATION DIVISION
Wichita, Kansas